




KURV-Y

Fully diffused flexible LED strip for recessed, curved architectural details

Type	Flexible linear accent lighting
LED/Output	s-line (407lm/m)
Colours	2500K/2700K/3200K
CRI	90
Lifetime	30,000hrs
IP	67
Control	0-10V/1-10V/DMX/DALI (via dimming sub-controllers)
Power	11.3W/m (24V DC)
Mounting	Recessed (Trimless)/Surface (Aluminium Rail)
Cover/Optics	Diffused
Finish	Flexible Silicone

Flexible

KKDC
www.kkdc.lighting

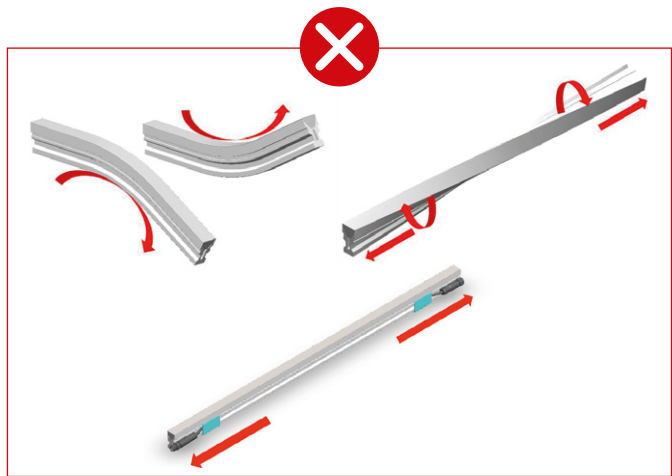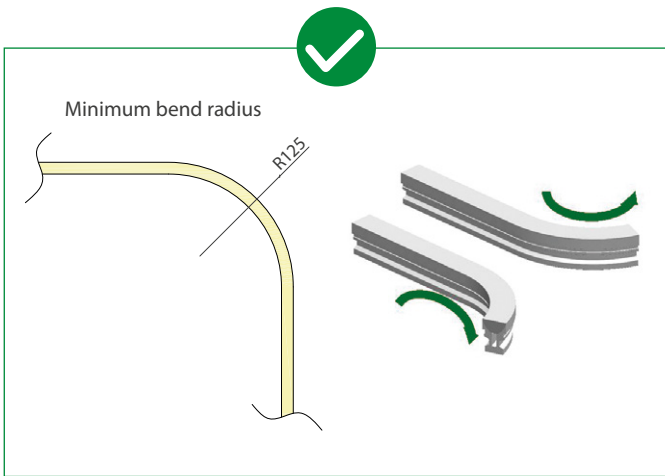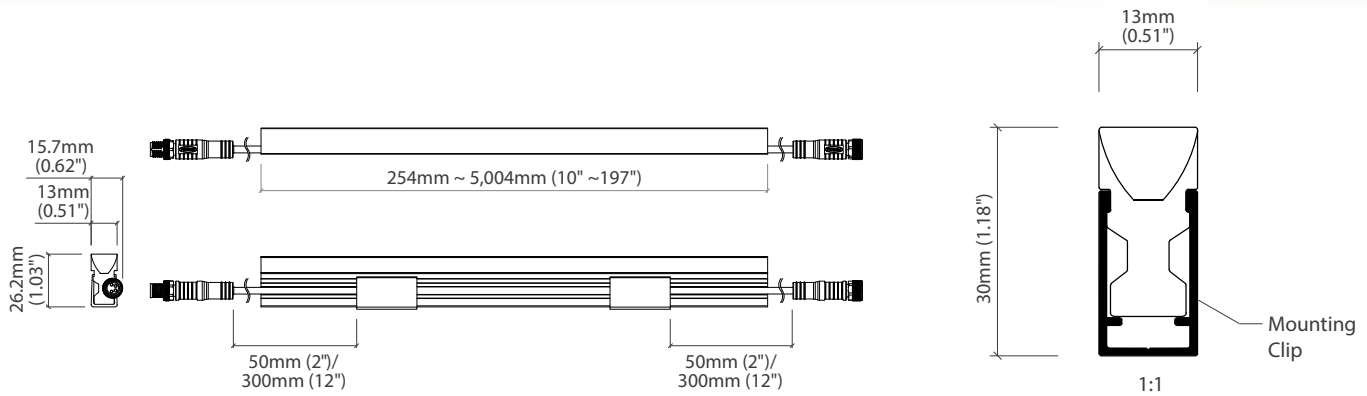

KURV-Y Order Code Table

Housing	Cover/Lens	LED Type	Colour (CCT)	Length Availability	IP Rating/Connection Type	Voltage					
KURV-Y	KY	Diffused	C	s-905 s905	2300K 23K	KURV-Y 905 M	254mm - 5004mm 50mm increments	50mm, single IP67 connector	67a7	24V DC	g
					2500K 25K			50mm, double IP67 connector	67a8		
					3200K 32K			300mm, single IP67 connector	67c7		
								300mm, double IP67 connector	67c8		

Code Example:

KY	-	C	-	s905	-	25K	-	M	1004	-	67a7	-	g
KURV-Y		Diffused		s-line 905		2500K		1004mm			50mm, single IP67 connector		24V DC

Flexible