


# PUK-L

Low profile surface mounted LED downlight with upgraded performance


<b>Type</b>	Premium quality under cabinet luminaire
<b>LED/Output</b>	Circular array, 14no. (Samsung, LG, ETI - 260lm)
<b>Colours</b>	2300K/2500K/2700K/3000K/3500K/3800K/5000K
<b>CRI</b>	90
<b>Lifetime</b>	50,000hrs
<b>IP</b>	44
<b>Control</b>	0-10V/1-10V/DMX/DALI (via dimming sub-controllers)
<b>Power</b>	3.6W (24V DC)
<b>Mounting</b>	Surface mounted
<b>Cover/Optics</b>	Diffused/Clear/Anti-glare Honeycomb louvre
<b>Finish</b>	Silver or Black anodised machined aluminium

Spotlights


**KKDC**  
www.kkdc.lighting

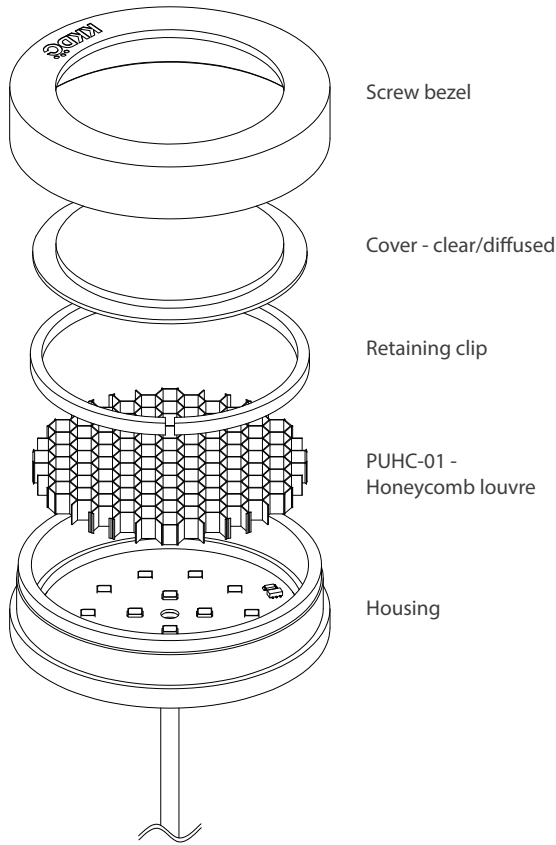

### Cover/Optic Options

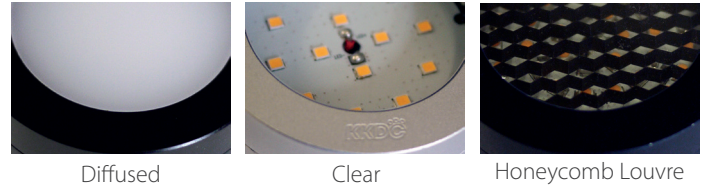

### Finish Options

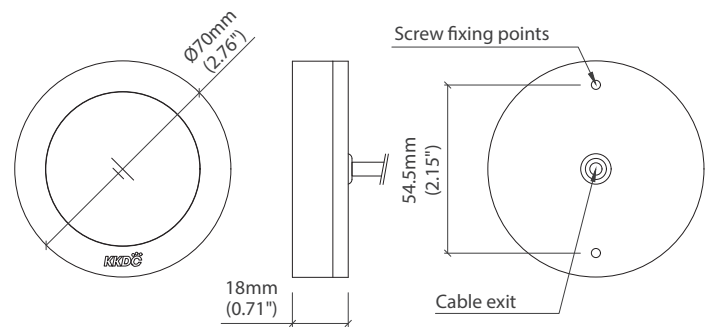

### PUK-L Order Code Table

Housing/Finish	Cover/Lens	LED Type	Colour (CCT)	IP Rating/Connection Type	Voltage						
PUK-L, Silver anodised	PLSA	Clear cover	B	143	s143	2300K	23K	IP44, 1000mm Single tail	44d1X	24V DC	g
		Diffused cover	C			2500K	25K		IP44, 1000mm Single tail, Honeycomb Louvre		
							2700K	27K			
							3000K	30K			
							3500K	35K			
							3800K	38K			
							5000K	50K			

### Code Example:

PLSA	-	B	-	s143	-	23K	-	44d1X	-	g
PUK-L, Silver anodised		Clear cover		143		2300K		IP44, 100mm Single tail		24V DC

Spotlights