

TANA Spot






Compact shelf light for highlight display illumination
used in-line with TANA profile

Type	Surface mounted directional shelving spotlight
LED/Output	3no. CREE/Lumileds High Power lensed array (207-257lm)
Colours	2700K*/2800K/3000K*/3500K/4000K/5000K**/6000K**
CRI	90*/80/70**
Lifetime	50,000hrs
IP	40
Control	Non-dimmable integral driver
Power	3.57W (24V DC)
Mounting	Surface mounted
Cover/Optics	16°/24°/26° lens
Finish	Silver anodised exterior housing


Linear

KKDC
www.kkdc.lighting


TANA Spot

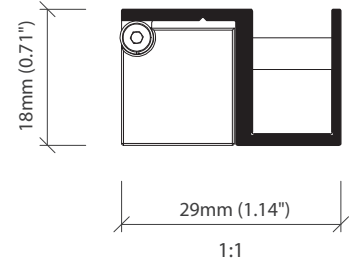


TANA Spot with 16° lens

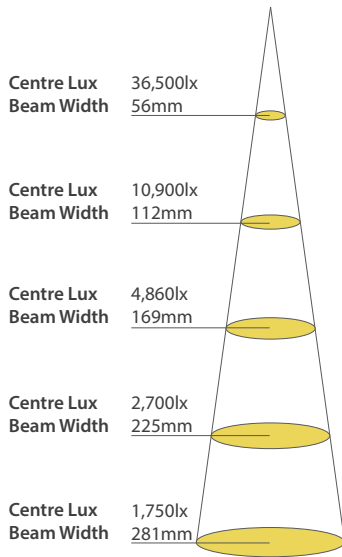

TANA Spot with 24° lens

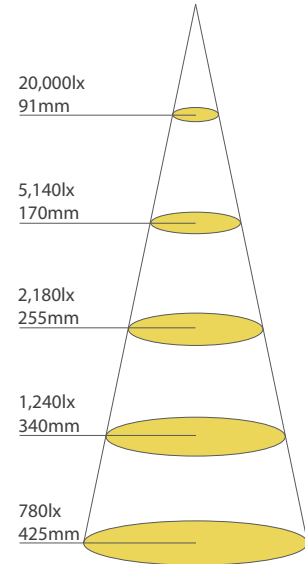

TANA Spot HCRI with 26° lens

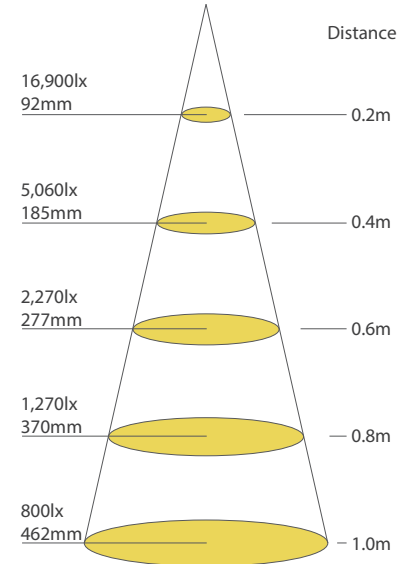

TANA Spot Order Code Table

Housing/Finish	LED Type	Colour (CCT)	IP Rating/Connection Type	Cover/Lens	Voltage
TANA Spot, Silver anodised	TASA h-TANA Spot	h108 2800K 28K	IP40, 300mm Single Tail	40c1 16° lens K	24V DC g
TANA Spot, Black anodised	TABA	3000K 30K	IP40, 300mm Double Tail	40c2 24° lens I	
		3200K 32K	IP40, 300mm Single IP20 connector	40c3	
		3800K 38K	IP40, 300mm Double IP20 connector	40c4	
		5000K 50K			
		6500K 65K			
	TANA Spot HCRI	h109 2700K 27K		26° lens J	
		3000K 30K			

Code Example:

TASA	-	h108	-	32K	-	40c3	-	K	-	g
TANA Spot, Silver anodised TANA Spot 3200K IP40, 300mm Single IP20 connector 16° lens 24V DC										

Linear