

Flexible

FX 2

Specification sheet

KKDC



Dimension	H2.2/W10/L125-7000mm (H0.09/W0.39/L4.92-275.59in) (IP20) H5.5/W14/L127-7002mm (H0.22/W0.55/L5.00-275.67in) (IP65/IP67)	
PCB increment	Power connection and cut points every 62.5mm (2.46in), price rounded up to closest 250mm (9.84in) increment	
LED pitch	12.5mm - 80LED/m (0.49in - 24LED/ft)	
Chip	s/e-line	Toyoda Gosei
	k-line	Samsung
Beam angle	110° (KKCR-03/KKCR-04) 110°	
Colours	s/e-line	2100K/2300K/2500K/2700K/3000K/3200K/3500K/4000K/5000K
	s-line	Single colours: Red/Green/Blue/Orange/Amber
	k-line	1900K/2100K/2500K/2700K/3000K/3500K/4000K/5000K
Bin/Step	s-line	2-step MacAdam ellipse (without-IP67)
	e/k-line	3-step MacAdam ellipse (e-line without-IP67)
CRI	≥ 90	
Lifetime	50,000 hours @ 25°C (50,000 hours @ 77°F)	
Operating temp	IP20: T _a = -25 to 50°C (T _c max = 67°C) T _a = -13 to 122°F (T _c max = 152.6°F) IP65/IP67: T _a = -25 to 50°C (T _c max = 67°C) T _a = -13 to 122°F (T _c max = 152.6°F)	
IP rating	IP20/IP65/IP67	
Finish	Silicone Cover for IP65/IP67	
Cover/lens	IP65 version with silicone sheathed Cover, IP67 Version With silicone sheathed Cover, (KKCR-03/KKCR-04) Diffused	
Mounting	3M double sided tape (IP20), surface mounting clips (IP65/IP67)	
Min bend radius	20mmØ (0.79in) Ø (IP20)/35mmØ (1.34in) Ø (IP65/IP67)	
Power feed	Hardwire tails or male/female connectors	
Control	0-10V/1-10V/DMX/DALI	



LED Grading Key

Exclusive Grade

s-line*
2-step CCT range

*KKDC tuned
CCT range

e-line*
3-step CCT range

Base Grade

k-line
3-step commercial range
Energy Star CCTs



PERFORMANCE DATA @ 3000K

Power consumption	Supply voltage	Supply current
7W/m (2.13W/ft)	24V DC	0.29A/m (0.09A/ft)

Colour Rendering Index (CRI)

	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
k-line	94	97	98	93	93	96	92	83	60	93	94	82	95	99

	No Cover				CRI	R9	Rf	Rg
s/e-line	560lm/m (171lm/ft)	79.3lm/W			93	62	-	-
k-line	550lm/m (168lm/ft)	78.1lm/W	480lm/m (150lm/ft)	67lm/W	92	60	-	-
			210lm/m (64lm/ft)	30lm/W				
			210lm/m (64lm/ft)	30lm/W				

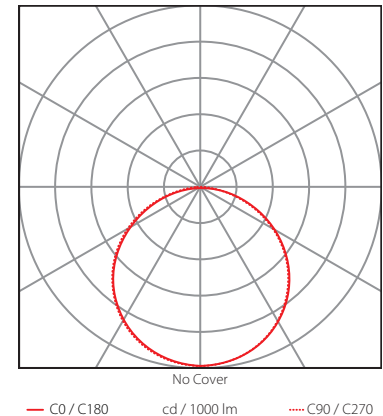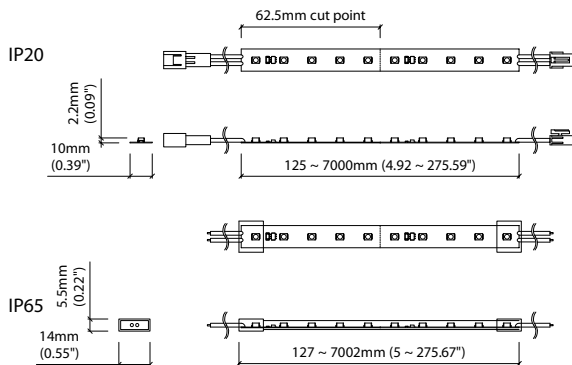

Data derived from independent UKAS / IESNA LM-79-08 accredited testing of production samples.

Flexible

FX 2 (IP20)

Length Availability List



Length Code		Fixture Length		LED Strip		End Cap Dimension		Wattage (W)	Output (lm)	
Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)		3000K (Test Data)	Range Data
m0125	i0005	125mm	4.92in	125mm	4.92in	N/A	N/A	0.88	69	55-71
m0188	i0007	188mm	7.38in	188mm	7.38in	N/A	N/A	1.31	104	82-107
m0250	i0010	250mm	9.84in	250mm	9.84in	N/A	N/A	1.75	139	109-142
m0313	i0012	313mm	12.30in	313mm	12.30in	N/A	N/A	2.19	173	137-178
m0375	i0015	375mm	14.76in	375mm	14.76in	N/A	N/A	2.63	208	164-213
m0438	i0017	438mm	17.22in	438mm	17.22in	N/A	N/A	3.06	243	191-249
m0500	i0020	500mm	19.69in	500mm	19.69in	N/A	N/A	3.50	278	219-284
m0563	i0022	563mm	22.15in	563mm	22.15in	N/A	N/A	3.94	312	246-320
m0625	i0025	625mm	24.61in	625mm	24.61in	N/A	N/A	4.38	347	273-355
m0688	i0027	688mm	27.07in	688mm	27.07in	N/A	N/A	4.81	382	301-391
m0750	i0030	750mm	29.53in	750mm	29.53in	N/A	N/A	5.25	416	328-426
m0813	i0032	813mm	31.99in	813mm	31.99in	N/A	N/A	5.69	451	355-462
m0875	i0034	875mm	34.45in	875mm	34.45in	N/A	N/A	6.13	486	383-497
m0938	i0037	938mm	36.91in	938mm	36.91in	N/A	N/A	6.56	520	410-533
m1000	i0039	1000mm	39.37in	1000mm	39.37in	N/A	N/A	7.00	555	437-569
m1063	i0042	1063mm	41.83in	1063mm	41.83in	N/A	N/A	7.44	590	465-604
m1125	i0044	1125mm	44.29in	1125mm	44.29in	N/A	N/A	7.88	624	492-640
m1188	i0047	1188mm	46.75in	1188mm	46.75in	N/A	N/A	8.31	659	519-675
m1250	i0049	1250mm	49.21in	1250mm	49.21in	N/A	N/A	8.75	694	547-711
m1313	i0052	1313mm	51.67in	1313mm	51.67in	N/A	N/A	9.19	729	574-746
m1375	i0054	1375mm	54.13in	1375mm	54.13in	N/A	N/A	9.63	763	601-782
m1438	i0057	1438mm	56.59in	1438mm	56.59in	N/A	N/A	10.06	798	629-817
m1500	i0059	1500mm	59.06in	1500mm	59.06in	N/A	N/A	10.50	833	656-853
m1563	i0062	1563mm	61.52in	1563mm	61.52in	N/A	N/A	10.94	867	683-888
m1625	i0064	1625mm	63.98in	1625mm	63.98in	N/A	N/A	11.38	902	711-924
m1688	i0066	1688mm	66.44in	1688mm	66.44in	N/A	N/A	11.81	937	738-959
m1750	i0069	1750mm	68.90in	1750mm	68.90in	N/A	N/A	12.25	971	765-995
m1813	i0071	1813mm	71.36in	1813mm	71.36in	N/A	N/A	12.69	1006	793-1031
m1875	i0074	1875mm	73.82in	1875mm	73.82in	N/A	N/A	13.13	1041	820-1066
m1938	i0076	1938mm	76.28in	1938mm	76.28in	N/A	N/A	13.56	1076	847-1102
m2000	i0079	2000mm	78.74in	2000mm	78.74in	N/A	N/A	14.00	1110	875-1137
m2063	i0081	2063mm	81.20in	2063mm	81.20in	N/A	N/A	14.44	1145	902-1173
m2125	i0084	2125mm	83.66in	2125mm	83.66in	N/A	N/A	14.88	1180	929-1208
m2188	i0086	2188mm	86.12in	2188mm	86.12in	N/A	N/A	15.31	1214	957-1244
m2250	i0089	2250mm	88.58in	2250mm	88.58in	N/A	N/A	15.75	1249	984-1279
m2313	i0091	2313mm	91.04in	2313mm	91.04in	N/A	N/A	16.19	1284	1011-1315
m2375	i0094	2375mm	93.50in	2375mm	93.50in	N/A	N/A	16.63	1318	1039-1350
m2438	i0096	2438mm	95.96in	2438mm	95.96in	N/A	N/A	17.06	1353	1066-1386
m2500	i0098	2500mm	98.43in	2500mm	98.43in	N/A	N/A	17.50	1388	1093-1421
m2563	i0101	2563mm	100.89in	2563mm	100.89in	N/A	N/A	17.94	1422	1121-1457
m2625	i0103	2625mm	103.35in	2625mm	103.35in	N/A	N/A	18.38	1457	1148-1492
m2688	i0106	2688mm	105.81in	2688mm	105.81in	N/A	N/A	18.81	1492	1175-1528
m2750	i0108	2750mm	108.27in	2750mm	108.27in	N/A	N/A	19.25	1527	1203-1564

Flexible

FX 2 (IP20)

Length Availability List




Length Code		Fixture Length		LED Strip		End Cap Dimension		Wattage (W)	Output (lm)	
Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)		3000K (Test Data)	Range Data
m2813	i0111	2813mm	110.73in	2813mm	110.73in	N/A	N/A	19.69	1561	1230-1599
m2875	i0113	2875mm	113.19in	2875mm	113.19in	N/A	N/A	20.13	1596	1257-1635
m2938	i0116	2938mm	115.65in	2938mm	115.65in	N/A	N/A	20.56	1631	1285-1670
m3000	i0118	3000mm	118.11in	3000mm	118.11in	N/A	N/A	21.00	1665	1312-1706
m3063	i0121	3063mm	120.57in	3063mm	120.57in	N/A	N/A	21.44	1700	1339-1741
m3125	i0123	3125mm	123.03in	3125mm	123.03in	N/A	N/A	21.88	1735	1367-1777
m3188	i0125	3188mm	125.49in	3188mm	125.49in	N/A	N/A	22.31	1769	1394-1812
m3250	i0128	3250mm	127.95in	3250mm	127.95in	N/A	N/A	22.75	1804	1421-1848
m3313	i0130	3313mm	130.41in	3313mm	130.41in	N/A	N/A	23.19	1839	1449-1883
m3375	i0133	3375mm	132.87in	3375mm	132.87in	N/A	N/A	23.63	1873	1476-1919
m3438	i0135	3438mm	135.33in	3438mm	135.33in	N/A	N/A	24.06	1908	1503-1954
m3500	i0138	3500mm	137.80in	3500mm	137.80in	N/A	N/A	24.50	1943	1531-1990
m3563	i0140	3563mm	140.26in	3563mm	140.26in	N/A	N/A	24.94	1978	1558-2026
m3625	i0143	3625mm	142.72in	3625mm	142.72in	N/A	N/A	25.38	2012	1585-2061
m3688	i0145	3688mm	145.18in	3688mm	145.18in	N/A	N/A	25.81	2047	1613-2097
m3750	i0148	3750mm	147.64in	3750mm	147.64in	N/A	N/A	26.25	2082	1640-2132
m3813	i0150	3813mm	150.10in	3813mm	150.10in	N/A	N/A	26.69	2116	1667-2168
m3875	i0153	3875mm	152.56in	3875mm	152.56in	N/A	N/A	27.13	2151	1695-2203
m3938	i0155	3938mm	155.02in	3938mm	155.02in	N/A	N/A	27.56	2186	1722-2239
m4000	i0157	4000mm	157.48in	4000mm	157.48in	N/A	N/A	28.00	2220	1749-2274
m4063	i0160	4063mm	159.94in	4063mm	159.94in	N/A	N/A	28.44	2255	1777-2310
m4125	i0162	4125mm	162.40in	4125mm	162.40in	N/A	N/A	28.88	2290	1804-2345
m4188	i0165	4188mm	164.86in	4188mm	164.86in	N/A	N/A	29.31	2324	1831-2381
m4250	i0167	4250mm	167.32in	4250mm	167.32in	N/A	N/A	29.75	2359	1859-2416
m4313	i0170	4313mm	169.78in	4313mm	169.78in	N/A	N/A	30.19	2394	1886-2452
m4375	i0172	4375mm	172.24in	4375mm	172.24in	N/A	N/A	30.63	2429	1913-2487
m4438	i0175	4438mm	174.70in	4438mm	174.70in	N/A	N/A	31.06	2463	1941-2523
m4500	i0177	4500mm	177.17in	4500mm	177.17in	N/A	N/A	31.50	2498	1968-2559
m4563	i0180	4563mm	179.63in	4563mm	179.63in	N/A	N/A	31.94	2533	1995-2594
m4625	i0182	4625mm	182.09in	4625mm	182.09in	N/A	N/A	32.38	2567	2023-2630
m4688	i0185	4688mm	184.55in	4688mm	184.55in	N/A	N/A	32.81	2602	2050-2665
m4750	i0187	4750mm	187.01in	4750mm	187.01in	N/A	N/A	33.25	2637	2077-2701
m4813	i0189	4813mm	189.47in	4813mm	189.47in	N/A	N/A	33.69	2671	2105-2736
m4875	i0192	4875mm	191.93in	4875mm	191.93in	N/A	N/A	34.13	2706	2132-2772
m4938	i0194	4938mm	194.39in	4938mm	194.39in	N/A	N/A	34.56	2741	2159-2807
m5000	i0197	5000mm	196.85in	5000mm	196.85in	N/A	N/A	35.00	2776	2187-2843
m5063	i0199	5063mm	199.31in	5063mm	199.31in	N/A	N/A	35.44	2810	2214-2878
m5125	i0202	5125mm	201.77in	5125mm	201.77in	N/A	N/A	35.88	2845	2241-2914
m5188	i0204	5188mm	204.23in	5188mm	204.23in	N/A	N/A	36.31	2880	2269-2949
m5250	i0207	5250mm	206.69in	5250mm	206.69in	N/A	N/A	36.75	2914	2296-2985
m5313	i0209	5313mm	209.15in	5313mm	209.15in	N/A	N/A	37.19	2949	2323-3021
m5375	i0212	5375mm	211.61in	5375mm	211.61in	N/A	N/A	37.63	2984	2351-3056
m5438	i0214	5438mm	214.07in	5438mm	214.07in	N/A	N/A	38.06	3018	2378-3092

Flexible

FX 2 (IP20) Length Availability List



Length Code		Fixture Length		LED Strip		End Cap Dimension		Wattage (W)	Output (lm)	
Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)		3000K (Test Data)	Range Data
m5500	i0217	5500mm	216.54in	5500mm	216.54in	N/A	N/A	38.50	3053	2405-3127
m5563	i0219	5563mm	219.00in	5563mm	219.00in	N/A	N/A	38.94	3088	2433-3163
m5625	i0221	5625mm	221.46in	5625mm	221.46in	N/A	N/A	39.38	3122	2460-3198
m5688	i0224	5688mm	223.92in	5688mm	223.92in	N/A	N/A	39.81	3157	2487-3234
m5750	i0226	5750mm	226.38in	5750mm	226.38in	N/A	N/A	40.25	3192	2515-3269
m5813	i0229	5813mm	228.84in	5813mm	228.84in	N/A	N/A	40.69	3227	2542-3305
m5875	i0231	5875mm	231.30in	5875mm	231.30in	N/A	N/A	41.13	3261	2569-3340
m5938	i0234	5938mm	233.76in	5938mm	233.76in	N/A	N/A	41.56	3296	2597-3376
m6000	i0236	6000mm	236.22in	6000mm	236.22in	N/A	N/A	42.00	3331	2624-3411
m6063	i0239	6063mm	238.68in	6063mm	238.68in	N/A	N/A	42.44	3365	2651-3447
m6125	i0241	6125mm	241.14in	6125mm	241.14in	N/A	N/A	42.88	3400	2679-3482
m6188	i0244	6188mm	243.60in	6188mm	243.60in	N/A	N/A	43.31	3435	2706-3518
m6250	i0246	6250mm	246.06in	6250mm	246.06in	N/A	N/A	43.75	3469	2734-3554
m6313	i0249	6313mm	248.52in	6313mm	248.52in	N/A	N/A	44.19	3504	2761-3589
m6375	i0251	6375mm	250.98in	6375mm	250.98in	N/A	N/A	44.63	3539	2788-3625
m6438	i0253	6438mm	253.44in	6438mm	253.44in	N/A	N/A	45.06	3573	2816-3660
m6500	i0256	6500mm	255.91in	6500mm	255.91in	N/A	N/A	45.50	3608	2843-3696
m6563	i0258	6563mm	258.37in	6563mm	258.37in	N/A	N/A	45.94	3643	2870-3731
m6625	i0261	6625mm	260.83in	6625mm	260.83in	N/A	N/A	46.38	3678	2898-3767
m6688	i0263	6688mm	263.29in	6688mm	263.29in	N/A	N/A	46.81	3712	2925-3802
m6750	i0266	6750mm	265.75in	6750mm	265.75in	N/A	N/A	47.25	3747	2952-3838
m6813	i0268	6813mm	268.21in	6813mm	268.21in	N/A	N/A	47.69	3782	2980-3873
m6875	i0271	6875mm	270.67in	6875mm	270.67in	N/A	N/A	48.13	3816	3007-3909
m6938	i0273	6938mm	273.13in	6938mm	273.13in	N/A	N/A	48.56	3851	3034-3944
m7000	i0276	7000mm	275.59in	7000mm	275.59in	N/A	N/A	49.00	3886	3062-3980

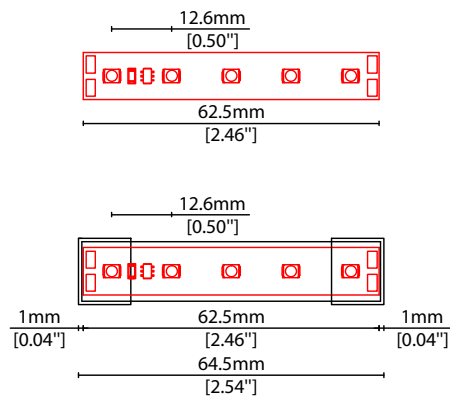

Flexible

FX 2 (IP65)

Length Availability List



Length Code		Fixture Length ¹		LED Strip ²		End Cap Dimension ³		Wattage (W)	Output (lm)	
Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)		3000K (Test Data)	Range Data
m0127	i0005	127mm	5.00in	125mm	4.92in	2mm	0.08in	0.88	59	47-61
m0190	i0007	190mm	7.46in	188mm	7.38in	2mm	0.08in	1.31	88	70-91
m0252	i0010	252mm	9.92in	250mm	9.84in	2mm	0.08in	1.75	117	94-122
m0315	i0012	315mm	12.38in	313mm	12.30in	2mm	0.08in	2.19	147	117-152
m0377	i0015	377mm	14.84in	375mm	14.76in	2mm	0.08in	2.63	176	141-183
m0440	i0017	440mm	17.30in	438mm	17.22in	2mm	0.08in	3.06	205	164-213
m0502	i0020	502mm	19.76in	500mm	19.69in	2mm	0.08in	3.50	235	188-244
m0565	i0022	565mm	22.22in	563mm	22.15in	2mm	0.08in	3.94	264	211-274
m0627	i0025	627mm	24.69in	625mm	24.61in	2mm	0.08in	4.38	293	235-305
m0690	i0027	690mm	27.15in	688mm	27.07in	2mm	0.08in	4.81	322	258-335
m0752	i0030	752mm	29.61in	750mm	29.53in	2mm	0.08in	5.25	352	281-366
m0815	i0032	815mm	32.07in	813mm	31.99in	2mm	0.08in	5.69	381	305-396
m0877	i0035	877mm	34.53in	875mm	34.45in	2mm	0.08in	6.13	410	328-427
m0940	i0037	940mm	36.99in	938mm	36.91in	2mm	0.08in	6.56	440	352-457
m1002	i0039	1002mm	39.45in	1000mm	39.37in	2mm	0.08in	7.00	469	375-488
m1065	i0042	1065mm	41.91in	1063mm	41.83in	2mm	0.08in	7.44	498	399-518
m1127	i0044	1127mm	44.37in	1125mm	44.29in	2mm	0.08in	7.88	528	422-549
m1190	i0047	1190mm	46.83in	1188mm	46.75in	2mm	0.08in	8.31	557	446-579
m1252	i0049	1252mm	49.29in	1250mm	49.21in	2mm	0.08in	8.75	586	469-610
m1315	i0052	1315mm	51.75in	1313mm	51.67in	2mm	0.08in	9.19	616	492-640
m1377	i0054	1377mm	54.21in	1375mm	54.13in	2mm	0.08in	9.63	645	516-671
m1440	i0057	1440mm	56.67in	1438mm	56.59in	2mm	0.08in	10.06	674	539-701
m1502	i0059	1502mm	59.13in	1500mm	59.06in	2mm	0.08in	10.50	704	563-732
m1565	i0062	1565mm	61.59in	1563mm	61.52in	2mm	0.08in	10.94	733	586-762
m1627	i0064	1627mm	64.06in	1625mm	63.98in	2mm	0.08in	11.38	762	610-793
m1690	i0067	1690mm	66.52in	1688mm	66.44in	2mm	0.08in	11.81	791	633-823
m1752	i0069	1752mm	68.98in	1750mm	68.90in	2mm	0.08in	12.25	821	657-854
m1815	i0071	1815mm	71.44in	1813mm	71.36in	2mm	0.08in	12.69	850	680-884
m1877	i0074	1877mm	73.90in	1875mm	73.82in	2mm	0.08in	13.13	879	704-915
m1940	i0076	1940mm	76.36in	1938mm	76.28in	2mm	0.08in	13.56	909	727-945
m2002	i0079	2002mm	78.82in	2000mm	78.74in	2mm	0.08in	14.00	938	750-976
m2065	i0081	2065mm	81.28in	2063mm	81.20in	2mm	0.08in	14.44	967	774-1006
m2127	i0084	2127mm	83.74in	2125mm	83.66in	2mm	0.08in	14.88	997	797-1036
m2190	i0086	2190mm	86.20in	2188mm	86.12in	2mm	0.08in	15.31	1026	821-1067
m2252	i0089	2252mm	88.66in	2250mm	88.58in	2mm	0.08in	15.75	1055	844-1097
m2315	i0091	2315mm	91.12in	2313mm	91.04in	2mm	0.08in	16.19	1085	868-1128
m2377	i0094	2377mm	93.58in	2375mm	93.50in	2mm	0.08in	16.63	1114	891-1158
m2440	i0096	2440mm	96.04in	2438mm	95.96in	2mm	0.08in	17.06	1143	915-1189
m2502	i0099	2502mm	98.50in	2500mm	98.43in	2mm	0.08in	17.50	1173	938-1219
m2565	i0101	2565mm	100.96in	2563mm	100.89in	2mm	0.08in	17.94	1202	961-1250
m2627	i0103	2627mm	103.43in	2625mm	103.35in	2mm	0.08in	18.38	1231	985-1280
m2690	i0106	2690mm	105.89in	2688mm	105.81in	2mm	0.08in	18.81	1260	1008-1311
m2752	i0108	2752mm	108.35in	2750mm	108.27in	2mm	0.08in	19.25	1290	1032-1341

Flexible

FX 2 (IP65)

Length Availability List




Length Code		Fixture Length ¹		LED Strip ²		End Cap Dimension ³		Wattage (W)	Output (lm)	
Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)		3000K (Test Data)	Range Data
m2815	i0111	2815mm	110.81in	2813mm	110.73in	2mm	0.08in	19.69	1319	1055-1372
m2877	i0113	2877mm	113.27in	2875mm	113.19in	2mm	0.08in	20.13	1348	1079-1402
m2940	i0116	2940mm	115.73in	2938mm	115.65in	2mm	0.08in	20.56	1378	1102-1433
m3002	i0118	3002mm	118.19in	3000mm	118.11in	2mm	0.08in	21.00	1407	1126-1463
m3065	i0121	3065mm	120.65in	3063mm	120.57in	2mm	0.08in	21.44	1436	1149-1494
m3127	i0123	3127mm	123.11in	3125mm	123.03in	2mm	0.08in	21.88	1466	1173-1524
m3190	i0126	3190mm	125.57in	3188mm	125.49in	2mm	0.08in	22.31	1495	1196-1555
m3252	i0128	3252mm	128.03in	3250mm	127.95in	2mm	0.08in	22.75	1524	1219-1585
m3315	i0130	3315mm	130.49in	3313mm	130.41in	2mm	0.08in	23.19	1554	1243-1616
m3377	i0133	3377mm	132.95in	3375mm	132.87in	2mm	0.08in	23.63	1583	1266-1646
m3440	i0135	3440mm	135.41in	3438mm	135.33in	2mm	0.08in	24.06	1612	1290-1677
m3502	i0138	3502mm	137.87in	3500mm	137.80in	2mm	0.08in	24.50	1642	1313-1707
m3565	i0140	3565mm	140.33in	3563mm	140.26in	2mm	0.08in	24.94	1671	1337-1738
m3627	i0143	3627mm	142.80in	3625mm	142.72in	2mm	0.08in	25.38	1700	1360-1768
m3690	i0145	3690mm	145.26in	3688mm	145.18in	2mm	0.08in	25.81	1729	1384-1799
m3752	i0148	3752mm	147.72in	3750mm	147.64in	2mm	0.08in	26.25	1759	1407-1829
m3815	i0150	3815mm	150.18in	3813mm	150.10in	2mm	0.08in	26.69	1788	1430-1860
m3877	i0153	3877mm	152.64in	3875mm	152.56in	2mm	0.08in	27.13	1817	1454-1890
m3940	i0155	3940mm	155.10in	3938mm	155.02in	2mm	0.08in	27.56	1847	1477-1921
m4002	i0158	4002mm	157.56in	4000mm	157.48in	2mm	0.08in	28.00	1876	1501-1951
m4065	i0160	4065mm	160.02in	4063mm	159.94in	2mm	0.08in	28.44	1905	1524-1982
m4127	i0162	4127mm	162.48in	4125mm	162.40in	2mm	0.08in	28.88	1935	1548-2012
m4190	i0165	4190mm	164.94in	4188mm	164.86in	2mm	0.08in	29.31	1964	1571-2042
m4252	i0167	4252mm	167.40in	4250mm	167.32in	2mm	0.08in	29.75	1993	1595-2073
m4315	i0170	4315mm	169.86in	4313mm	169.78in	2mm	0.08in	30.19	2023	1618-2103
m4377	i0172	4377mm	172.32in	4375mm	172.24in	2mm	0.08in	30.63	2052	1642-2134
m4440	i0175	4440mm	174.78in	4438mm	174.70in	2mm	0.08in	31.06	2081	1665-2164
m4502	i0177	4502mm	177.24in	4500mm	177.17in	2mm	0.08in	31.50	2111	1688-2195
m4565	i0180	4565mm	179.70in	4563mm	179.63in	2mm	0.08in	31.94	2140	1712-2225
m4627	i0182	4627mm	182.17in	4625mm	182.09in	2mm	0.08in	32.38	2169	1735-2256
m4690	i0185	4690mm	184.63in	4688mm	184.55in	2mm	0.08in	32.81	2198	1759-2286
m4752	i0187	4752mm	187.09in	4750mm	187.01in	2mm	0.08in	33.25	2228	1782-2317
m4815	i0190	4815mm	189.55in	4813mm	189.47in	2mm	0.08in	33.69	2257	1806-2347
m4877	i0192	4877mm	192.01in	4875mm	191.93in	2mm	0.08in	34.13	2286	1829-2378
m4940	i0194	4940mm	194.47in	4938mm	194.39in	2mm	0.08in	34.56	2316	1853-2408
m5002	i0197	5002mm	196.93in	5000mm	196.85in	2mm	0.08in	35.00	2345	1876-2439
m5065	i0199	5065mm	199.39in	5063mm	199.31in	2mm	0.08in	35.44	2374	1899-2469
m5127	i0202	5127mm	201.85in	5125mm	201.77in	2mm	0.08in	35.88	2404	1923-2500
m5190	i0204	5190mm	204.31in	5188mm	204.23in	2mm	0.08in	36.31	2433	1946-2530
m5252	i0207	5252mm	206.77in	5250mm	206.69in	2mm	0.08in	36.75	2462	1970-2561
m5315	i0209	5315mm	209.23in	5313mm	209.15in	2mm	0.08in	37.19	2492	1993-2591
m5377	i0212	5377mm	211.69in	5375mm	211.61in	2mm	0.08in	37.63	2521	2017-2622
m5440	i0214	5440mm	214.15in	5438mm	214.07in	2mm	0.08in	38.06	2550	2040-2652

Flexible

FX 2 (IP65) Length Availability List



Length Code		Fixture Length ¹		LED Strip ²		End Cap Dimension ³		Wattage (W)	Output (lm)	
Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)		3000K (Test Data)	Range Data
m5502	i0217	5502mm	216.61in	5500mm	216.54in	2mm	0.08in	38.50	2580	2064-2683
m5565	i0219	5565mm	219.07in	5563mm	219.00in	2mm	0.08in	38.94	2609	2087-2713
m5627	i0222	5627mm	221.54in	5625mm	221.46in	2mm	0.08in	39.38	2638	2111-2744
m5690	i0224	5690mm	224.00in	5688mm	223.92in	2mm	0.08in	39.81	2667	2134-2774
m5752	i0226	5752mm	226.46in	5750mm	226.38in	2mm	0.08in	40.25	2697	2157-2805
m5815	i0229	5815mm	228.92in	5813mm	228.84in	2mm	0.08in	40.69	2726	2181-2835
m5877	i0231	5877mm	231.38in	5875mm	231.30in	2mm	0.08in	41.13	2755	2204-2866
m5940	i0234	5940mm	233.84in	5938mm	233.76in	2mm	0.08in	41.56	2785	2228-2896
m6002	i0236	6002mm	236.30in	6000mm	236.22in	2mm	0.08in	42.00	2814	2251-2927
m6065	i0239	6065mm	238.76in	6063mm	238.68in	2mm	0.08in	42.44	2843	2275-2957
m6127	i0241	6127mm	241.22in	6125mm	241.14in	2mm	0.08in	42.88	2873	2298-2988
m6190	i0244	6190mm	243.68in	6188mm	243.60in	2mm	0.08in	43.31	2902	2322-3018
m6252	i0246	6252mm	246.14in	6250mm	246.06in	2mm	0.08in	43.75	2931	2345-3049
m6315	i0249	6315mm	248.60in	6313mm	248.52in	2mm	0.08in	44.19	2961	2368-3079
m6377	i0251	6377mm	251.06in	6375mm	250.98in	2mm	0.08in	44.63	2990	2392-3109
m6440	i0254	6440mm	253.52in	6438mm	253.44in	2mm	0.08in	45.06	3019	2415-3140
m6502	i0256	6502mm	255.98in	6500mm	255.91in	2mm	0.08in	45.50	3049	2439-3170
m6565	i0258	6565mm	258.44in	6563mm	258.37in	2mm	0.08in	45.94	3078	2462-3201
m6627	i0261	6627mm	260.91in	6625mm	260.83in	2mm	0.08in	46.38	3107	2486-3231
m6690	i0263	6690mm	263.37in	6688mm	263.29in	2mm	0.08in	46.81	3136	2509-3262
m6752	i0266	6752mm	265.83in	6750mm	265.75in	2mm	0.08in	47.25	3166	2533-3292
m6815	i0268	6815mm	268.29in	6813mm	268.21in	2mm	0.08in	47.69	3195	2556-3323
m6877	i0271	6877mm	270.75in	6875mm	270.67in	2mm	0.08in	48.13	3224	2580-3353
m6940	i0273	6940mm	273.21in	6938mm	273.13in	2mm	0.08in	48.56	3254	2603-3384
m7002	i0276	7002mm	275.67in	7000mm	275.59in	2mm	0.08in	49.00	3283	2626-3414

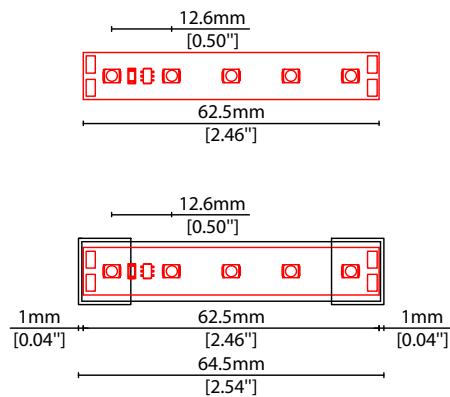

Flexible

FX 2 (IP67)

Length Availability List



Length Code		Fixture Length ¹		LED Strip ²		End Cap Dimension ³		Wattage (W)	Output (lm)	
Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)		3000K (Test Data)	Range Data
m0127	i0005	127mm	5.00in	125mm	4.92in	2mm	0.08in	0.88	59	47-61
m0190	i0007	190mm	7.46in	188mm	7.38in	2mm	0.08in	1.31	88	70-91
m0252	i0010	252mm	9.92in	250mm	9.84in	2mm	0.08in	1.75	117	94-122
m0315	i0012	315mm	12.38in	313mm	12.30in	2mm	0.08in	2.19	147	117-152
m0377	i0015	377mm	14.84in	375mm	14.76in	2mm	0.08in	2.63	176	141-183
m0440	i0017	440mm	17.30in	438mm	17.22in	2mm	0.08in	3.06	205	164-213
m0502	i0020	502mm	19.76in	500mm	19.69in	2mm	0.08in	3.50	235	188-244
m0565	i0022	565mm	22.22in	563mm	22.15in	2mm	0.08in	3.94	264	211-274
m0627	i0025	627mm	24.69in	625mm	24.61in	2mm	0.08in	4.38	293	235-305
m0690	i0027	690mm	27.15in	688mm	27.07in	2mm	0.08in	4.81	322	258-335
m0752	i0030	752mm	29.61in	750mm	29.53in	2mm	0.08in	5.25	352	281-366
m0815	i0032	815mm	32.07in	813mm	31.99in	2mm	0.08in	5.69	381	305-396
m0877	i0035	877mm	34.53in	875mm	34.45in	2mm	0.08in	6.13	410	328-427
m0940	i0037	940mm	36.99in	938mm	36.91in	2mm	0.08in	6.56	440	352-457
m1002	i0039	1002mm	39.45in	1000mm	39.37in	2mm	0.08in	7.00	469	375-488
m1065	i0042	1065mm	41.91in	1063mm	41.83in	2mm	0.08in	7.44	498	399-518
m1127	i0044	1127mm	44.37in	1125mm	44.29in	2mm	0.08in	7.88	528	422-549
m1190	i0047	1190mm	46.83in	1188mm	46.75in	2mm	0.08in	8.31	557	446-579
m1252	i0049	1252mm	49.29in	1250mm	49.21in	2mm	0.08in	8.75	586	469-610
m1315	i0052	1315mm	51.75in	1313mm	51.67in	2mm	0.08in	9.19	616	492-640
m1377	i0054	1377mm	54.21in	1375mm	54.13in	2mm	0.08in	9.63	645	516-671
m1440	i0057	1440mm	56.67in	1438mm	56.59in	2mm	0.08in	10.06	674	539-701
m1502	i0059	1502mm	59.13in	1500mm	59.06in	2mm	0.08in	10.50	704	563-732
m1565	i0062	1565mm	61.59in	1563mm	61.52in	2mm	0.08in	10.94	733	586-762
m1627	i0064	1627mm	64.06in	1625mm	63.98in	2mm	0.08in	11.38	762	610-793
m1690	i0067	1690mm	66.52in	1688mm	66.44in	2mm	0.08in	11.81	791	633-823
m1752	i0069	1752mm	68.98in	1750mm	68.90in	2mm	0.08in	12.25	821	657-854
m1815	i0071	1815mm	71.44in	1813mm	71.36in	2mm	0.08in	12.69	850	680-884
m1877	i0074	1877mm	73.90in	1875mm	73.82in	2mm	0.08in	13.13	879	704-915
m1940	i0076	1940mm	76.36in	1938mm	76.28in	2mm	0.08in	13.56	909	727-945
m2002	i0079	2002mm	78.82in	2000mm	78.74in	2mm	0.08in	14.00	938	750-976
m2065	i0081	2065mm	81.28in	2063mm	81.20in	2mm	0.08in	14.44	967	774-1006
m2127	i0084	2127mm	83.74in	2125mm	83.66in	2mm	0.08in	14.88	997	797-1036
m2190	i0086	2190mm	86.20in	2188mm	86.12in	2mm	0.08in	15.31	1026	821-1067
m2252	i0089	2252mm	88.66in	2250mm	88.58in	2mm	0.08in	15.75	1055	844-1097
m2315	i0091	2315mm	91.12in	2313mm	91.04in	2mm	0.08in	16.19	1085	868-1128
m2377	i0094	2377mm	93.58in	2375mm	93.50in	2mm	0.08in	16.63	1114	891-1158
m2440	i0096	2440mm	96.04in	2438mm	95.96in	2mm	0.08in	17.06	1143	915-1189
m2502	i0099	2502mm	98.50in	2500mm	98.43in	2mm	0.08in	17.50	1173	938-1219
m2565	i0101	2565mm	100.96in	2563mm	100.89in	2mm	0.08in	17.94	1202	961-1250
m2627	i0103	2627mm	103.43in	2625mm	103.35in	2mm	0.08in	18.38	1231	985-1280
m2690	i0106	2690mm	105.89in	2688mm	105.81in	2mm	0.08in	18.81	1260	1008-1311
m2752	i0108	2752mm	108.35in	2750mm	108.27in	2mm	0.08in	19.25	1290	1032-1341

Flexible

FX 2 (IP67)

Length Availability List



Length Code		Fixture Length ¹		LED Strip ²		End Cap Dimension ³		Wattage (W)	Output (lm)	
Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)		3000K (Test Data)	Range Data
m2815	i0111	2815mm	110.81in	2813mm	110.73in	2mm	0.08in	19.69	1319	1055-1372
m2877	i0113	2877mm	113.27in	2875mm	113.19in	2mm	0.08in	20.13	1348	1079-1402
m2940	i0116	2940mm	115.73in	2938mm	115.65in	2mm	0.08in	20.56	1378	1102-1433
m3002	i0118	3002mm	118.19in	3000mm	118.11in	2mm	0.08in	21.00	1407	1126-1463
m3065	i0121	3065mm	120.65in	3063mm	120.57in	2mm	0.08in	21.44	1436	1149-1494
m3127	i0123	3127mm	123.11in	3125mm	123.03in	2mm	0.08in	21.88	1466	1173-1524
m3190	i0126	3190mm	125.57in	3188mm	125.49in	2mm	0.08in	22.31	1495	1196-1555
m3252	i0128	3252mm	128.03in	3250mm	127.95in	2mm	0.08in	22.75	1524	1219-1585
m3315	i0130	3315mm	130.49in	3313mm	130.41in	2mm	0.08in	23.19	1554	1243-1616
m3377	i0133	3377mm	132.95in	3375mm	132.87in	2mm	0.08in	23.63	1583	1266-1646
m3440	i0135	3440mm	135.41in	3438mm	135.33in	2mm	0.08in	24.06	1612	1290-1677
m3502	i0138	3502mm	137.87in	3500mm	137.80in	2mm	0.08in	24.50	1642	1313-1707
m3565	i0140	3565mm	140.33in	3563mm	140.26in	2mm	0.08in	24.94	1671	1337-1738
m3627	i0143	3627mm	142.80in	3625mm	142.72in	2mm	0.08in	25.38	1700	1360-1768
m3690	i0145	3690mm	145.26in	3688mm	145.18in	2mm	0.08in	25.81	1729	1384-1799
m3752	i0148	3752mm	147.72in	3750mm	147.64in	2mm	0.08in	26.25	1759	1407-1829
m3815	i0150	3815mm	150.18in	3813mm	150.10in	2mm	0.08in	26.69	1788	1430-1860
m3877	i0153	3877mm	152.64in	3875mm	152.56in	2mm	0.08in	27.13	1817	1454-1890
m3940	i0155	3940mm	155.10in	3938mm	155.02in	2mm	0.08in	27.56	1847	1477-1921
m4002	i0158	4002mm	157.56in	4000mm	157.48in	2mm	0.08in	28.00	1876	1501-1951
m4065	i0160	4065mm	160.02in	4063mm	159.94in	2mm	0.08in	28.44	1905	1524-1982
m4127	i0162	4127mm	162.48in	4125mm	162.40in	2mm	0.08in	28.88	1935	1548-2012
m4190	i0165	4190mm	164.94in	4188mm	164.86in	2mm	0.08in	29.31	1964	1571-2042
m4252	i0167	4252mm	167.40in	4250mm	167.32in	2mm	0.08in	29.75	1993	1595-2073
m4315	i0170	4315mm	169.86in	4313mm	169.78in	2mm	0.08in	30.19	2023	1618-2103
m4377	i0172	4377mm	172.32in	4375mm	172.24in	2mm	0.08in	30.63	2052	1642-2134
m4440	i0175	4440mm	174.78in	4438mm	174.70in	2mm	0.08in	31.06	2081	1665-2164
m4502	i0177	4502mm	177.24in	4500mm	177.17in	2mm	0.08in	31.50	2111	1688-2195
m4565	i0180	4565mm	179.70in	4563mm	179.63in	2mm	0.08in	31.94	2140	1712-2225
m4627	i0182	4627mm	182.17in	4625mm	182.09in	2mm	0.08in	32.38	2169	1735-2256
m4690	i0185	4690mm	184.63in	4688mm	184.55in	2mm	0.08in	32.81	2198	1759-2286
m4752	i0187	4752mm	187.09in	4750mm	187.01in	2mm	0.08in	33.25	2228	1782-2317
m4815	i0190	4815mm	189.55in	4813mm	189.47in	2mm	0.08in	33.69	2257	1806-2347
m4877	i0192	4877mm	192.01in	4875mm	191.93in	2mm	0.08in	34.13	2286	1829-2378
m4940	i0194	4940mm	194.47in	4938mm	194.39in	2mm	0.08in	34.56	2316	1853-2408
m5002	i0197	5002mm	196.93in	5000mm	196.85in	2mm	0.08in	35.00	2345	1876-2439
m5065	i0199	5065mm	199.39in	5063mm	199.31in	2mm	0.08in	35.44	2374	1899-2469
m5127	i0202	5127mm	201.85in	5125mm	201.77in	2mm	0.08in	35.88	2404	1923-2500
m5190	i0204	5190mm	204.31in	5188mm	204.23in	2mm	0.08in	36.31	2433	1946-2530
m5252	i0207	5252mm	206.77in	5250mm	206.69in	2mm	0.08in	36.75	2462	1970-2561
m5315	i0209	5315mm	209.23in	5313mm	209.15in	2mm	0.08in	37.19	2492	1993-2591
m5377	i0212	5377mm	211.69in	5375mm	211.61in	2mm	0.08in	37.63	2521	2017-2622
m5440	i0214	5440mm	214.15in	5438mm	214.07in	2mm	0.08in	38.06	2550	2040-2652

Flexible

FX 2 (IP67)

Length Availability List



Length Code		Fixture Length ¹		LED Strip ²		End Cap Dimension ³		Wattage (W)	Output (lm)	
Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)		3000K (Test Data)	Range Data
m5502	i0217	5502mm	216.61in	5500mm	216.54in	2mm	0.08in	38.50	2580	2064-2683
m5565	i0219	5565mm	219.07in	5563mm	219.00in	2mm	0.08in	38.94	2609	2087-2713
m5627	i0222	5627mm	221.54in	5625mm	221.46in	2mm	0.08in	39.38	2638	2111-2744
m5690	i0224	5690mm	224.00in	5688mm	223.92in	2mm	0.08in	39.81	2667	2134-2774
m5752	i0226	5752mm	226.46in	5750mm	226.38in	2mm	0.08in	40.25	2697	2157-2805
m5815	i0229	5815mm	228.92in	5813mm	228.84in	2mm	0.08in	40.69	2726	2181-2835
m5877	i0231	5877mm	231.38in	5875mm	231.30in	2mm	0.08in	41.13	2755	2204-2866
m5940	i0234	5940mm	233.84in	5938mm	233.76in	2mm	0.08in	41.56	2785	2228-2896
m6002	i0236	6002mm	236.30in	6000mm	236.22in	2mm	0.08in	42.00	2814	2251-2927
m6065	i0239	6065mm	238.76in	6063mm	238.68in	2mm	0.08in	42.44	2843	2275-2957
m6127	i0241	6127mm	241.22in	6125mm	241.14in	2mm	0.08in	42.88	2873	2298-2988
m6190	i0244	6190mm	243.68in	6188mm	243.60in	2mm	0.08in	43.31	2902	2322-3018
m6252	i0246	6252mm	246.14in	6250mm	246.06in	2mm	0.08in	43.75	2931	2345-3049
m6315	i0249	6315mm	248.60in	6313mm	248.52in	2mm	0.08in	44.19	2961	2368-3079
m6377	i0251	6377mm	251.06in	6375mm	250.98in	2mm	0.08in	44.63	2990	2392-3109
m6440	i0254	6440mm	253.52in	6438mm	253.44in	2mm	0.08in	45.06	3019	2415-3140
m6502	i0256	6502mm	255.98in	6500mm	255.91in	2mm	0.08in	45.50	3049	2439-3170
m6565	i0258	6565mm	258.44in	6563mm	258.37in	2mm	0.08in	45.94	3078	2462-3201
m6627	i0261	6627mm	260.91in	6625mm	260.83in	2mm	0.08in	46.38	3107	2486-3231
m6690	i0263	6690mm	263.37in	6688mm	263.29in	2mm	0.08in	46.81	3136	2509-3262
m6752	i0266	6752mm	265.83in	6750mm	265.75in	2mm	0.08in	47.25	3166	2533-3292
m6815	i0268	6815mm	268.29in	6813mm	268.21in	2mm	0.08in	47.69	3195	2556-3323
m6877	i0271	6877mm	270.75in	6875mm	270.67in	2mm	0.08in	48.13	3224	2580-3353
m6940	i0273	6940mm	273.21in	6938mm	273.13in	2mm	0.08in	48.56	3254	2603-3384
m7002	i0276	7002mm	275.67in	7000mm	275.59in	2mm	0.08in	49.00	3283	2626-3414

MOUNTING OPTIONS


Note: Accessories are to be ordered separately with corresponding code shown below.



KKCP-07

Side clip
(allow 4 per metre/40in)


White plastic

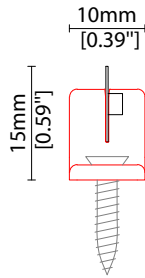

KKCP-08

IP65 side clip
(allow 4 per metre/40in)


Clear plastic

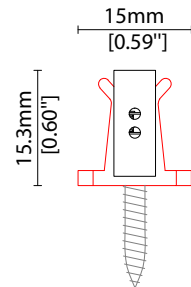


KKBK-14

IP65 silicone bracket
(allow 4 per metre/40in)


Translucent silicone

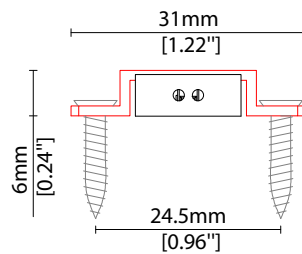

CONNECTORS




KKCN-01 50mm (1.97in) pair
KKCN-03 300mm (11.81in) pair
2 PIN male + female connector set

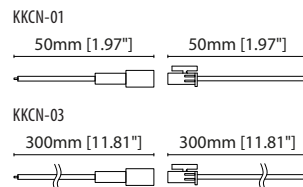

KKCN-06

2 PIN 300mm (11.81in) extension lead



Flexible

FX 2 Accessories

KKDÖ

KKDC CONTROL



IP20
Black plastic housing
L164/W64/H34mm
(L6.46/W2.52/H1.34in)

KKDM-05 1-10V
visDIM dimmable sub-controller



IP20
Black plastic housing
L164/W64/H34mm
(L6.46/W2.52/H1.34in)

KKSC-03A DMX (screw terminal)
visDIM dimmable sub-controller



IP20
Black plastic housing
L164/W64/H34mm
(L6.46/W2.52/H1.34in)

KKSC-03B DMX (RJ45)
visDIM dimmable sub-controller



IP20
Plastic housing
L170/W59/H29mm
(L6.69/W2.32/H1.14in)

KKDL-02 DALI
visDIM dimmable sub-controller
(4 x 8A max @ 12-36V)



IP20
Plastic housing
L166/W53.4/H23mm
(L6.54/W2.10/H0.91in)

KKDL-03 DALI
visDIM dimmable sub-controller
(4 x 5A max @ 12-36V)



FX Driver/PSU Options



AVAILABLE PSU OPTIONS

Control Mode	PSU (Order Code)	Input Voltage AC	Output Voltage DC	Rated Output Current	Rated Power	Dim %	IP Rating
Switched	CEN-60-24	90-295V	24V	2.5A	60W	-	IP67
	HLG-60H-24	90-305V	24V	2.5A	60W	-	IP67
	HLG-100H-24	90-305V	24V	4.0A	100W	-	IP67
	HLG-150H-24	90-305V	24V	6.3A	150W	-	IP67
	HLG-240H-24	90-305V	24V	10A	240W	-	IP67
0-10V (1-10V)	PWM-40-24	90-305V	24V	1.67A	40W	100-0.15 (100-10)	IP67
	PWM-60-24	90-305V	24V	2.5A	60W	100-0.15 (100-10)	IP67
	PWM-90-24	90-305V	24V	3.67A	90W	100-0.15 (100-10)	IP67
	PWM-120-24	90-305V	24V	5.0A	120W	100-0.15 (100-10)	IP67
DALI	LIN100A1	120-277V	24V	1A per channel	100W	100-0.1	IP66/IP40
DMX RGB	LIN100A1	120-277V	24V	1.33A per channel	100W	100-0.1	IP66/IP40
DMX RGBW	LIN100A1	120-277A	24V	1A per channel	100W	100-0.1	IP66/IP40

Flicker Free Options - Combination of PSU+ sub-controller

Control Mode	PSU (Order Code)	Sub-controller (Order Code)	Input Voltage AC	Output Voltage DC	Rated Output Current	Rated Power	Dim %	IP Rating PSU/ Sub-controller
0-10V or 1-10V	CEN-60-24	KKDM-05	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-60H-24	KKDM-05	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-100H-24	KKDM-05	90-295V	24V	4.0A	100W	100-0.9	IP67/IP20
	HLG-150H-24	KKDM-05	90-295V	24V	6.3A	150W	100-0.9	IP67/IP20
	HLG-240H-24	KKDM-05	90-295V	24V	10.0A	240W	100-0.9	IP67/IP20
	CEN-60-24	KKDL-02/03	90-295V	24V	2.5A	60W	100-0.1	IP67/IP20
DALI	HLG-60H-24	KKDL-02/03	90-305V	24V	2.5A	60W	100-0.1	IP67/IP20
	HLG-100H-24	KKDL-02/03	90-305V	24V	4.0A	100W	100-0.1	IP67/IP20
	HLG-150H-24	KKDL-02/03	90-305V	24V	6.3A	150W	100-0.1	IP67/IP20
	HLG-240H-24	KKDL-02/03	90-305V	24V	10.0A	240W	100-0.1	IP67/IP20
DMX RGB	CEN-60-24	KKSC-03	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-60H-24	KKSC-03	90-305V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-100H-24	KKSC-03	90-305V	24V	4A	100W	100-0.9	IP67/IP20
	HLG-150H-24	KKSC-03	90-305V	24V	6.3A	150W	100-0.9	IP67/IP20
	HLG-240H-24	KKSC-03	90-305V	24V	10.0A	240W	100-0.9	IP67/IP20

¹ The items shown above cover the most frequently used specification but does not exhaust the possible options

² PSU and/or driver can be chosen from the table, or KKDC may recommend the best option upon receipt of the controls requirement and installation environment

³ Electrical shop drawing will include detailed information of PSU and relevant control drivers

⁴ Cut sheets are available on the controls section of www.kkdc.lighting or upon request