

# 2 Pin IP67 Connectors

## Specification sheet

IP67





### PRODUCT SPECIFICATION

<b>Dimensions</b>	Ø22/L100mm (Ø0.87/L3.94in) (male + female connected)
<b>Operating Temp</b>	T <sub>a</sub> = -40 to 105°C (-40 to 221°F)
<b>IP Rating</b>	IP67
<b>Finish</b>	Matt Black
<b>Shell Materials</b>	Nylon PA66
<b>Contact Materials</b>	Brass with gold-plated
<b>Contact Ø</b>	Ø1.5mm (0.6in) x 2 (2 pin)
<b>Rated Current</b>	8A (2 pin)
<b>Rated Voltage</b>	300V AC
<b>Test Voltage</b>	2,000V (AC. V/min)
<b>Contact Resistance</b>	≤10mΩ
<b>Insulation Resistance</b>	≥500mΩ at DC 500V
<b>Outer Cable Ø Range</b>	Ø4 - 6.5mm (0.16 - 0.26in) Ø5 - 8mm (0.2 - 0.31in)
<b>Applicable products</b>	KURV Groove, KURV-X, MIMI, MIMI Glow, MIMI SL, MIMI Poki, MOMO, MOMO Sauna, MOMO-L, MOMO-R, MOMO-F, MOMO Bloc, MOMO Power, MOMO-F Power, MOMO-L Power, MOMO-R Power, SEN, SEN Asymmetric, SEN-F Asymmetric, SEN CV, SEN CC, SEN Louvre CV, SEN Louvre CC, SEN-F CV, SEN-F CC, SUMO, TAYO Ceiling, TAYO Spot, TAYO Micro




Female

Male

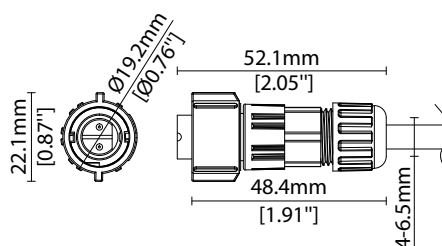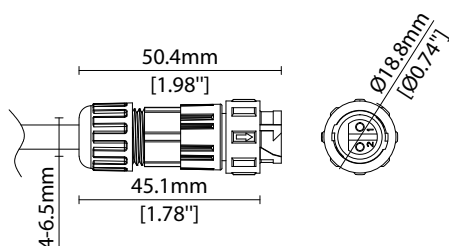

#### 3000 S67A 3000mm (118.11") Single Ø4.3mm sheath IP67 connector



#### 3000 D67A 3000mm (118.11") Double Ø4.3mm sheath IP67 connector

