

5 Pin IP67 Connectors (Premoulded)

Specification sheet

IP67





PRODUCT SPECIFICATION

Dimensions	Ø22/L92mm (Ø0.87/L3.62in) (male + female connected)
Operating Temp	T _a = -40 to 105°C (-40 to 221°F)
IP Rating	IP67
Finish	Matt Black
Shell Materials	Nylon PA66
Contact Materials	Brass with gold-plated
Contact Ø	Ø1mm (0.04in) x5 (5 pin)
Rated Current	3A (5 pin)
Rated Voltage	300V AC
Test Voltage	1,500V (AC. V/min)
Contact Resistance	≤5mΩ
Insulation Resistance	≥500mΩ at DC 500V
Outer Cable Ø Range	Ø4 - 6.5mm (0.16 - 0.26in) Ø5 - 8mm (0.2 - 0.31in)
Relevant products	MOMO RGBW, MOMO-L RGBW, MOMO-R RGBW, MOMO-F RGBW, SEN CV Indoor RGBW, SEN Louvre CV RGBW




Female

Male

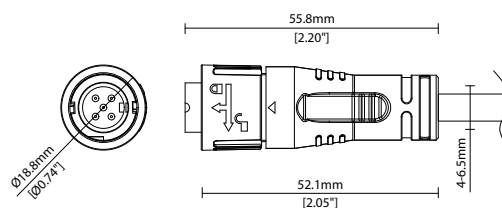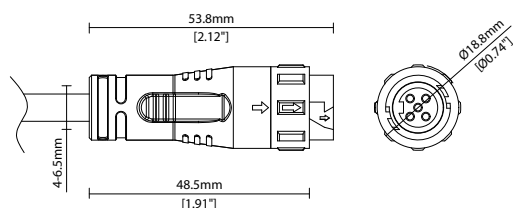

0300/1000 S67A 300/1000mm (11.81/39.37") Single ø4.3mm sheath IP67 connector



0300/1000 D67A 300/1000mm (11.81/39.37") Double ø4.3mm sheath IP67 connector

