

5 Pin IP67 Connectors

Specification sheet

IP67




PRODUCT SPECIFICATION


| | |
|------------------------------|---|
| Dimensions | Ø22/L100mm (Ø0.87/L3.94in) (male + female connected) |
| Operating Temp | T _a = -40 to 105°C (-40 to 221°F) |
| IP Rating | IP67 |
| Finish | Matt Black |
| Shell Materials | Nylon PA66 |
| Contact Materials | Brass with gold-plated |
| Contact Ø | Ø1mm (0.04in) x5 (5 pin) |
| Rated Current | 3A (5 pin) |
| Rated Voltage | 300V AC, DC |
| Test Voltage | 1,500V (AC. V/min) |
| Contact Resistance | ≤5mΩ |
| Insulation Resistance | ≥500mΩ at DC 500V |
| Outer Cable Ø Range | Ø4 - 6.5mm (0.16 - 0.26in) Ø5 - 8mm (0.2 - 0.31in) |
| Relevant products | MOMO RGBW, MOMO-L RGBW, MOMO-R RGBW, MOMO-F RGBW, SEN CV Indoor RGBW, SEN Louvre CV RGBW |




Female

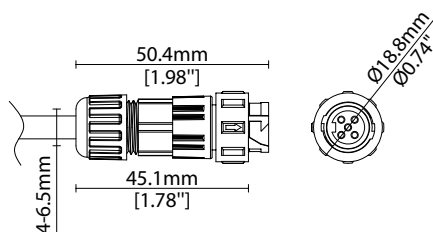

Male

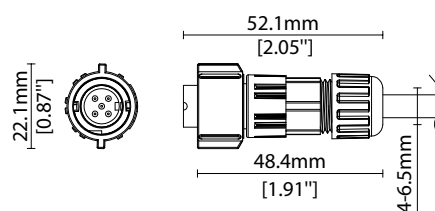

3000 S67A 3000mm (118.11") Single ø4.3mm sheath IP67 connector



3000 D67A 3000mm (118.11") Double ø4.3mm sheath IP67 connector

