


### PRODUCT SPECIFICATION


<b>Dimension</b>	Ø20/L87mm (Ø0.79/L3.4in) (male + female connected)
<b>Operating Temp</b>	T <sub>a</sub> = -40 to 85°C (-40 to 185°F)
<b>IP Rating</b>	IP67
<b>Finish</b>	Matt Black
<b>Shell Materials</b>	Nylon PA66, fire resistance (UL94): V-0
<b>Contact Materials</b>	Brass with gold plating
<b>Contact Ø</b>	Ø1.6mm (0.6in) x2 (2 pole)/Ø1mm (0.04in) x4 (4 pole)
<b>Rated Current</b>	13A (2 pole)/5A (4 pole)
<b>Rated Voltage</b>	250V (2 pole)/200V (4 pole)
<b>Test Voltage</b>	1500V (AC. V/1min)
<b>Contact Resistance</b>	2mΩ
<b>Insulation Resistance</b>	2000mΩ
<b>Outer Cable Ø Range</b>	Ø4 - 6.5mm (0.16 - 0.26in) Ø5 - 8mm (0.2 - 0.31in)




#### Female Connector 2 PIN (IP67)

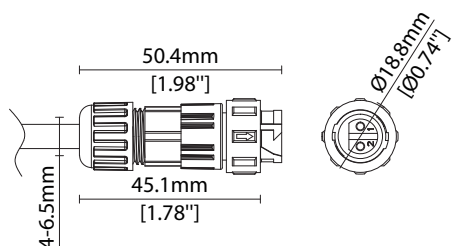

#### Male Connector 2 PIN (IP67)

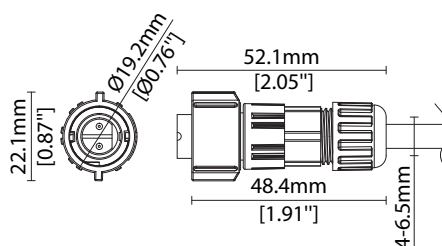

#### Female Connector 4 PIN (IP67)

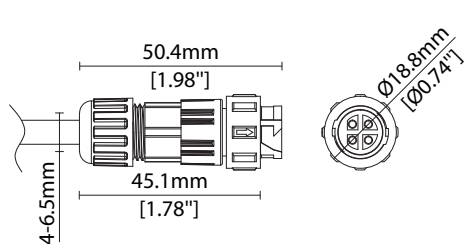

#### Male Connector 4 PIN (IP67)

