

Linear

# LINI-S XL R020

## Fixture Guide

# KKDÖ

Indoor | Surface | Output up to 1230lm/m (375lm/ft)




### Key applications

- ✓ Architectural detail
- ✓ Cove lighting
- ✓ Direct lighting
- ✓ Interior
- ✓ Mirror back lighting
- ✓ Retail display
- ✓ Shelving display

### Key features


- ✓ Custom lengths
- ✓ Constant Voltage (CV)
- ✓ Diffusion: homogenous
- ✓ Direct view
- ✓ Extensive CCT range
- ✓ IP40 dry area



### MOUNTING METHODS



KKCP-11 Concealed clip



KKCR-01-1000 Cable raceway (1000mm)  
KKCR-01-2000 Cable raceway (2000mm)  
KKCR-01-3000 Cable raceway (3000mm)



KKJT-02 Joining bar

Linear

# LINI-S XL R020

## Specification sheet



<b>Dimensions</b>	H28/W22/L94-2011mm (H1.1/W0.87/L3.70-79.17in)
<b>PCB Cut-point</b>	41.7mm increment/2000mm max (1.64in increment/78.74in max)
<b>LED Pitch</b>	6.95mm-144LED/m (0.27in - 44LED/ft)
<b>Chip</b>	<b>s-line</b> <b>k-line</b>
<b>Cover/Optics</b>	Clear (50°)/Diffused (120°)
<b>CCT</b>	<b>s-line:</b> 1900K/2100K/2300K/2500K/2700K/3000K/3500K/4000K/5000K <b>k-line:</b> 1900K/2100K/2300K/2500K/2700K/3000K/3500K/4000K/5000K
<b>LED binning</b>	<b>s-line:</b> 2-step MacAdam ellipse <b>k-line:</b> 3-step MacAdam ellipse
<b>CRI</b>	≥92
<b>Lifetime</b>	50,000 hours @ 25°C (50,000 hours @ 77°F)
<b>Operating temp</b>	T <sub>a</sub> = -25 to 50°C (T <sub>c</sub> max = 80°C) T <sub>a</sub> = -13 to 113°F (T <sub>c</sub> max = 176°F)
<b>IP Rating</b>	IP40
<b>Finish</b>	Silver anodised
<b>Mounting</b>	Surface mounting via concealed clips
<b>Power feed</b>	Hardwire tails or male/female connectors
<b>Control</b>	0-10V/1-10V/DMX/DALI



### LED Grading Key

#### Exclusive Grade



<b>s</b> s-line*	*KKDC tuned CCT range
2-step CCT range	

#### Base Grade

<b>k</b> k-line	3-step commercial range
	Energy Star CCTs

<b>Power consumption</b>	<b>Supply voltage</b>	<b>Supply current</b>
20W/m (6.10W/ft)	24V DC	0.83A/m (0.25A/ft)

	Clear Cover	Diffused Cover	CRI	R9	Rf	Rg
<b>s-line</b>	1230lm/m (375lm/ft) 61.5lm/W	848lm/m (258lm/ft) 42.4lm/W	93	63	-	-
<b>k-line</b>	1160lm/m (354lm/ft) 58lm/W	790lm/m (241lm/ft) 40lm/W	92	62	-	-

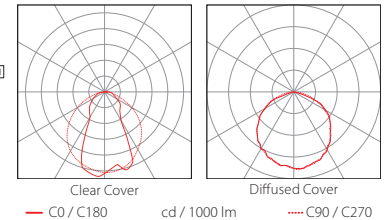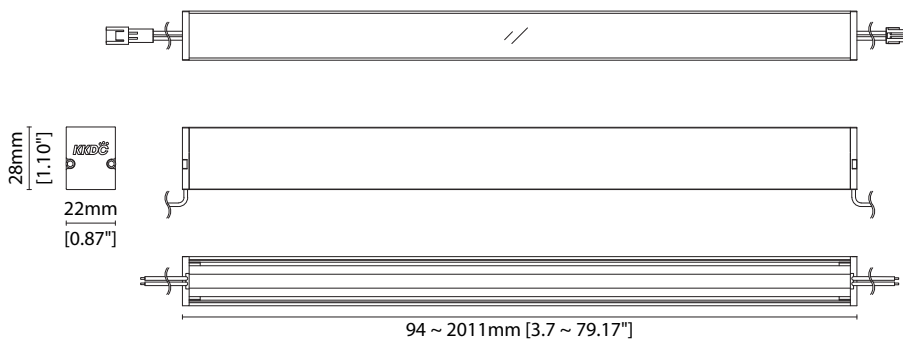

Data derived from independent UKAS/IESNA LM-79-08 accredited testing of production samples.

# LINI-S XL R020

## Code Table



### FIXTURE

Model	Finish	Cover <sup>1</sup>	Grade <sup>2</sup>	LED	Colour (CCT)	Length Availability <sup>3</sup>	IP	Cable Length	Power Feed <sup>4</sup>	Input
LINI-S XL SX	Silver Anodised SA	Clear B	s	R020 R020	1900K 19	m 94-2011mm 71.4mm increments	IP40 40	300mm/11.81" 0300	S00X	DC 24V g
					2100K 21					
		Diffused C	k	2300K 23	i 3.71-79.17in 2.81in increments	Double no sheath tail D00X				
				2500K 25				(Specify length code OR total run length)		
				2700K 27	Single no sheath IP20 connector S20X					
				3000K 30		Double no sheath IP20 connector D20X				
		3500K 35								
		4000K 40								
5000K 50										

<sup>1</sup> Refer to **Cover/Lens Options** on **Options** pages

<sup>2</sup> Refer to **LED Grading Key** on **Specification sheet** page

<sup>3</sup> Refer to **Length Availability List** or enter total run length instead of length code

<sup>4</sup> Refer to **Power Feed Options** on **Options** pages

### Code Example:

SX	-	SA	-	C	-	s	-	R020	-	35	-	m	511	-	40	-	0300	-	D00X	-	g
LINI-S XL		Silver Anodised		Diffused				R020		3500K		511mm		IP40		300mm/11.81"		Double no sheath tail		DC 24V	

### ACCESSORIES

#### Mounting Accessories

KKCP-11	Concealed Clip
KKCR-01-1000	1000mm/39.37" Cable Raceway
KKCR-01-2000	2000mm/78.74" Cable Raceway
KKCR-01-3000	3000mm/118.11" Cable Raceway
KKJT-02	Joining Bar

#### Connection Accessories

KKCN-01	2 PIN male & female 50mm/1.97" pair
KKCN-03	2 PIN male & female 300mm/11.81" pair
KKCN-06	2 PIN 300mm/11.81" extension lead

\* Refer to **Power feed** on **Accessories** pages

#### PSU/Driver

0-10V/1-10V/DALI/DMX

\* Refer to **Driver/PSU Options** page for details or provide requirement and KKDC to offer the suitable option

\* Refer to **Mounting accessories** on **Accessories** pages

### LED ENGINE VARIANTS (LED STRIP TYPE)

Colour	LED	Lumen/m	Lumen/ft	W/m	W/ft	Spec Doc	Length	Increment
Single CCT	R007	423	129	7	2.13	LINI-S XL R007	94-2011mm/3.71-79.17in	41.7mm/1.64in
	R014	772	235	14	4.27	LINI-S XL R014	94-2011mm/3.71-79.17in	41.7mm/1.64in
	<b>R020</b>	<b>1230</b>	<b>375</b>	<b>20</b>	<b>6.10</b>	<b>LINI-S XL R020</b>	<b>94-2011mm/3.71-79.17in</b>	<b>41.7mm/1.64in</b>
Warm Dim/Dynamic White	A040	3080	939	40	12.19	LINI-S XL A040	88.0-1511mm/3.46-59.49in	38.46mm/1.51in
	R207	423	129	16	4.88	LINI-S XL R207	94-2011mm/3.71-79.17in	41.7mm/1.64in
RGB	501	Red 85 Green 184 Blue 30 RGB 267	Red 26 Green 56 Blue 9 RGB 81	15.6	4.75	LINI-S XL RGB	94-2011mm/3.71-79.17in	41.7mm/1.64in
RGBW	R201	727	222	20	6.10	LINI-S XL RGBW	136-2011mm/5.35-79.17in	62.5mm/2.46in

\* Performance data: A/s-line, clear cover, 3000K

# LINI-S XL R020

## Length Availability List



Length Code		Fixture Length <sup>1</sup>		LED Strip <sup>2</sup>		End Cap Dimension <sup>3</sup>		Wattage (W)	Output (lm)
Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)		3000K (Test Data)
m0094	i0004	94mm	3.71in	83mm	3.28in	6mm	0.24in	1.67	97
m0136	i0005	136mm	5.35in	125mm	4.92in	6mm	0.24in	2.50	145
m0178	i0007	178mm	6.99in	167mm	6.56in	6mm	0.24in	3.33	193
m0219	i0009	219mm	8.64in	208mm	8.20in	6mm	0.24in	4.17	242
m0261	i0010	261mm	10.28in	250mm	9.84in	6mm	0.24in	5.00	290
m0303	i0012	303mm	11.92in	292mm	11.48in	6mm	0.24in	5.83	338
m0344	i0014	344mm	13.56in	333mm	13.12in	6mm	0.24in	6.67	387
m0386	i0015	386mm	15.20in	375mm	14.76in	6mm	0.24in	7.50	435
m0428	i0017	428mm	16.84in	417mm	16.40in	6mm	0.24in	8.33	483
m0469	i0018	469mm	18.48in	458mm	18.04in	6mm	0.24in	9.17	532
m0511	i0020	511mm	20.12in	500mm	19.69in	6mm	0.24in	10.00	580
m0553	i0022	553mm	21.76in	542mm	21.33in	6mm	0.24in	10.83	628
m0594	i0023	594mm	23.40in	583mm	22.97in	6mm	0.24in	11.67	677
m0636	i0025	636mm	25.04in	625mm	24.61in	6mm	0.24in	12.50	725
m0678	i0027	678mm	26.68in	667mm	26.25in	6mm	0.24in	13.33	773
m0719	i0028	719mm	28.32in	708mm	27.89in	6mm	0.24in	14.17	822
m0761	i0030	761mm	29.96in	750mm	29.53in	6mm	0.24in	15.00	870
m0803	i0032	803mm	31.60in	792mm	31.17in	6mm	0.24in	15.83	918
m0844	i0033	844mm	33.24in	833mm	32.81in	6mm	0.24in	16.67	967
m0886	i0035	886mm	34.88in	875mm	34.45in	6mm	0.24in	17.50	1015
m0928	i0037	928mm	36.52in	917mm	36.09in	6mm	0.24in	18.33	1063
m0969	i0038	969mm	38.16in	958mm	37.73in	6mm	0.24in	19.17	1112
m1011	i0040	1011mm	39.80in	1000mm	39.37in	6mm	0.24in	20.00	1160
m1053	i0041	1053mm	41.44in	1042mm	41.01in	6mm	0.24in	20.83	1208
m1094	i0043	1094mm	43.08in	1083mm	42.65in	6mm	0.24in	21.67	1257
m1136	i0045	1136mm	44.72in	1125mm	44.29in	6mm	0.24in	22.50	1305
m1178	i0046	1178mm	46.36in	1167mm	45.93in	6mm	0.24in	23.33	1353
m1219	i0048	1219mm	48.01in	1208mm	47.57in	6mm	0.24in	24.17	1402
m1261	i0050	1261mm	49.65in	1250mm	49.21in	6mm	0.24in	25.00	1450
m1303	i0051	1303mm	51.29in	1292mm	50.85in	6mm	0.24in	25.83	1498
m1344	i0053	1344mm	52.93in	1333mm	52.49in	6mm	0.24in	26.67	1547
m1386	i0055	1386mm	54.57in	1375mm	54.13in	6mm	0.24in	27.50	1595
m1428	i0056	1428mm	56.21in	1417mm	55.77in	6mm	0.24in	28.33	1643
m1469	i0058	1469mm	57.85in	1458mm	57.41in	6mm	0.24in	29.17	1692
m1511	i0059	1511mm	59.49in	1500mm	59.06in	6mm	0.24in	30.00	1740
m1553	i0061	1553mm	61.13in	1542mm	60.70in	6mm	0.24in	30.83	1788
m1594	i0063	1594mm	62.77in	1583mm	62.34in	6mm	0.24in	31.67	1837
m1636	i0064	1636mm	64.41in	1625mm	63.98in	6mm	0.24in	32.50	1885
m1678	i0066	1678mm	66.05in	1667mm	65.62in	6mm	0.24in	33.33	1933
m1719	i0068	1719mm	67.69in	1708mm	67.26in	6mm	0.24in	34.17	1982
m1761	i0069	1761mm	69.33in	1750mm	68.90in	6mm	0.24in	35.00	2030
m1803	i0071	1803mm	70.97in	1792mm	70.54in	6mm	0.24in	35.83	2078
m1844	i0073	1844mm	72.61in	1833mm	72.18in	6mm	0.24in	36.67	2127

# LINI-S XL R020

## Length Availability List




Length Code		Fixture Length <sup>1</sup>		LED Strip <sup>2</sup>		End Cap Dimension <sup>3</sup>		Wattage (W)	Output (lm)
Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)		3000K (Test Data)
m1886	i0074	1886mm	74.25in	1875mm	73.82in	6mm	0.24in	37.50	2175
m1928	i0076	1928mm	75.89in	1917mm	75.46in	6mm	0.24in	38.33	2223
m1969	i0078	1969mm	77.53in	1958mm	77.10in	6mm	0.24in	39.17	2272
m2011	i0079	2011mm	79.17in	2000mm	78.74in	6mm	0.24in	40.00	2320

<sup>1</sup> Actual total overall length of light fixture (LED strip + end caps + void/wire hole)

<sup>2</sup> Actual length of PCB strip

<sup>3</sup> Actual length of 2x end caps

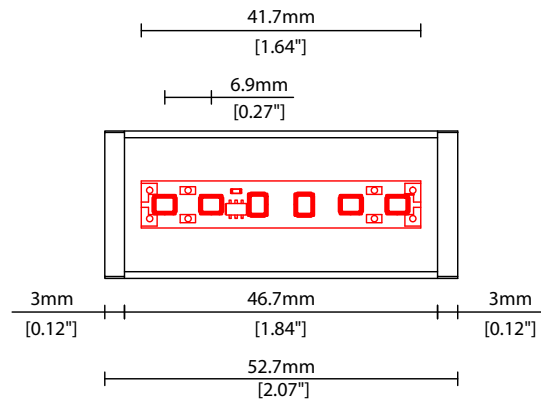





# LINI-S XL R020

## Options




### COVER/LENS OPTIONS

\* Options are an integral part of the fixture ordering codes. Please refer to **Code Table** pages.




**B** Clear cover  
W22/H27.9mm (W0.87/H1.10")




**C** Diffused cover  
W22/H27.9mm (W0.87/H1.10")

### POWER FEED OPTIONS


0300 S00X 300mm (11.81") Single no sheath tail




0300 D00X 300mm (11.81") Double no sheath tail




0300 S20X 300mm (11.81") Single no sheath IP20 connector




0300 D20X 300mm (11.81") Double no sheath IP20 connector




1000 S00X 1000mm (39.37") Single no sheath tail




1000 D00X 1000mm (39.37") Double no sheath tail



1000 S20X 1000mm (39.37") Single no sheath IP20 connector



1000 D20X 1000mm (39.37") Double no sheath IP20 connector




#### Key



Control Gear Power supply, sub-controllers & control systems  
 JB Junction box / cable connection

### POWER FEED OPTIONS (CONTINUED)

#### 2 Pin Female Connector

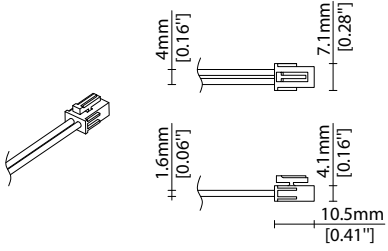

#### 2 Pin Male Connector

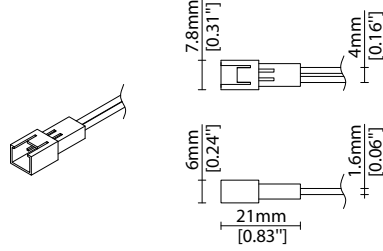





### MOUNTING ACCESSORIES

Note: Accessories are to be ordered separately with corresponding code shown below.



#### KKCP-11



Concealed clip  
(allow 3 per metre/40in)  
S/Steel finish  
L20/W22/H28.1mm  
(L0.79/W0.87/H1.11")



KKCR-01-1000 1000mm (39.37in)  
KKCR-01-2000 2000mm (78.74in)  
KKCR-01-3000 3000mm (118.11in)

Cable raceway\*  
anodised aluminium finish  
W22/H36.4mm (W0.87/H1.43")


\* Cut & drilled to fit on site

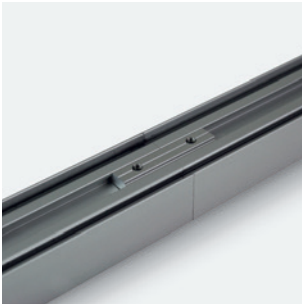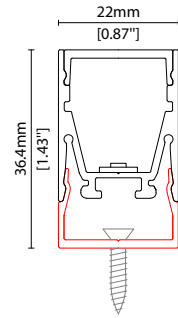



#### KKJT-02

Joining bar\* (allow 1 per join)  
anodised aluminium finish  
L25mm (L0.98")


\* Mounting option required with  
Joining bar



### POWER FEED



**KKCN-01** 50mm (1.97in) pair  
**KKCN-03** 300mm (11.81in) pair  
 2 PIN male + female connector set



**KKCN-06**  
 2 PIN 300mm (11.81in) extension lead

### KKDC CONTROL



IP20  
 Plastic housing  
 L170/W59/H29mm  
 (L6.69/W2.32/H1.14in)

**KKDM-06** 1-10V  
 visDIM dimmable sub-controller  
 (4 x 8A max @ 12-36V)



IP20  
 Plastic housing  
 L170/W53.4/H28mm  
 (L6.69/W2.10/H1.10in)

**KKSC-05** DMX  
 visDIM dimmable sub-controller  
 (4 x 5A max @ 12-36V)



IP20  
 Plastic housing  
 L170/W59/H29mm  
 (L6.69/W2.32/H1.14in)

**KKDL-02** DALI  
 visDIM dimmable sub-controller  
 (4 x 8A max @ 12-36V)



IP20  
 Plastic housing  
 L166/W53.4/H23mm  
 (L6.54/W2.10/H0.91in)

**KKDL-03** DALI  
 visDIM dimmable sub-controller  
 (4 x 5A max @ 12-36V)

### AVAILABLE PSU OPTIONS

Control Mode	PSU (Order Code)	Input Voltage AC	Output Voltage DC	Rated Output Current	Rated Power	Dim %	IP Rating
Switched	CEN-60-24	90-295V	24V	2.5A	60W	-	IP67
	HLG-60H-24	90-305V	24V	2.5A	60W	-	IP67
	HLG-100H-24	90-305V	24V	4.0A	100W	-	IP67
	HLG-150H-24	90-305V	24V	6.3A	150W	-	IP67
	HLG-240H-24	90-305V	24V	10A	240W	-	IP67
0-10V (1-10V)	PWM-40-24	90-305V	24V	1.67A	40W	100-0.15 (100-10)	IP67
	PWM-60-24	90-305V	24V	2.5A	60W	100-0.15 (100-10)	IP67
	PWM-90-24	90-305V	24V	3.67A	90W	100-0.15 (100-10)	IP67
	PWM-120-24	90-305V	24V	5.0A	120W	100-0.15 (100-10)	IP67
DALI	LIN100A1	120-277V	24V	1A per channel	100W	100-0.1	IP66/IP40
DMX RGB	LIN100A1	120-277V	24V	1.33A per channel	100W	100-0.1	IP66/IP40
DMX RGBW	LIN100A1	120-277A	24V	1A per channel	100W	100-0.1	IP66/IP40

### Flicker Free Options - Combination of PSU+ sub-controller

Control Mode	PSU (Order Code)	Sub-controller (Order Code)	Input Voltage AC	Output Voltage DC	Rated Output Current	Rated Power	Dim %	IP Rating PSU/ Sub-controller
0-10V or 1-10V	CEN-60-24	KKDM-06	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-60H-24	KKDM-06	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-100H-24	KKDM-06	90-295V	24V	4.0A	100W	100-0.9	IP67/IP20
	HLG-150H-24	KKDM-06	90-295V	24V	6.3A	150W	100-0.9	IP67/IP20
	HLG-240H-24	KKDM-06	90-295V	24V	10.0A	240W	100-0.9	IP67/IP20
DALI	CEN-60-24	KKDL-02/03	90-295V	24V	2.5A	60W	100-0.1	IP67/IP20
	HLG-60H-24	KKDL-02/03	90-305V	24V	2.5A	60W	100-0.1	IP67/IP20
	HLG-100H-24	KKDL-02/03	90-305V	24V	4.0A	100W	100-0.1	IP67/IP20
	HLG-150H-24	KKDL-02/03	90-305V	24V	6.3A	150W	100-0.1	IP67/IP20
	HLG-240H-24	KKDL-02/03	90-305V	24V	10.0A	240W	100-0.1	IP67/IP20
DMX RGB	CEN-60-24	KKSC-05	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-60H-24	KKSC-05	90-305V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-100H-24	KKSC-05	90-305V	24V	4A	100W	100-0.9	IP67/IP20
	HLG-150H-24	KKSC-05	90-305V	24V	6.3A	150W	100-0.9	IP67/IP20
	HLG-240H-24	KKSC-05	90-305V	24V	10.0A	240W	100-0.9	IP67/IP20

<sup>1</sup> The items shown above cover the most frequently used specification but does not exhaust the possible options

<sup>2</sup> PSU and/or driver can be chosen from the table, or KKDC may recommend the best option upon receipt of the controls requirement and installation environment

<sup>3</sup> Electrical shop drawing will include detailed information of PSU and relevant control drivers

<sup>4</sup> Cut sheets are available on the controls section of [www.kkdc.lighting](http://www.kkdc.lighting) or upon request