

Linear

# MOMO Bloc R007

## Fixture Guide

# KKDÖ

Indoor/Outdoor | Recessed | Output up to 145lm/m (44lm/ft)




### Key applications

- ✓ Architectural detail
- ✓ Direct lighting
- ✓ Exterior
- ✓ In ground
- ✓ Orientation lighting
- ✓ Pathways/driveways
- ✓ Public spaces
- ✓ Uplighting
- ✓ Wall grazing

### Key features

- ✓ Custom lengths
- ✓ Constant Voltage (CV)
- ✓ Continuous light runs
- ✓ Diffusion: homogenous
- ✓ Direct view
- ✓ IK08
- ✓ In ground driveover
- ✓ In ground walkover
- ✓ IP67 waterproof

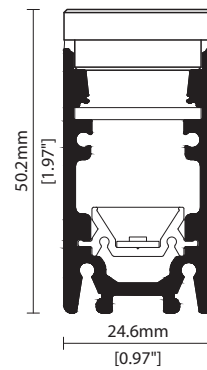

### MOUNTING METHODS



KKBG-01 Ground box



KKBG-02 Ground box



KKBG-03 Ground box


Linear

# MOMO Bloc R007

## Specification sheet



<b>Dimensions</b>	H50.15/W24.6/L524/1024mm (H1.98/W0.97/L20.63/40.31in)
<b>PCB Cut-point</b>	41.7mm increment/2000mm max (1.64in increment/78.74in max)
<b>LED Pitch</b>	6.95mm-144LED/m (0.27in - 44LED/ft)
<b>Chip</b>	<b>s-line</b> <b>k-line</b>
<b>Cover/Optics</b>	Frosted glass (78°)
<b>CCT</b>	<b>s-line:</b> 2300K/3000K/3400K/4000K/4100K Single colours: Red/Green/Blue/Orange/Amber <b>k-line:</b> 2300K/3000K/3400K/4000K/4100K
<b>LED binning</b>	<b>s-line:</b> 2-step MacAdam ellipse <b>k-line:</b> 3-step MacAdam ellipse
<b>CRI</b>	≥ 90
<b>Lifetime</b>	50,000 hours @ 25°C (50,000 hours @ 77°F)
<b>Operating temp</b>	T <sub>a</sub> = -25 to 50°C (T <sub>c</sub> max = 72.9°C) T <sub>a</sub> = -13 to 122°F (T <sub>c</sub> max = 163°F)
<b>IP Rating</b>	IP67
<b>Finish</b>	Silver/Hard anodised (stainless steel ground box)
<b>Mounting</b>	Recessed ground box
<b>Power feed</b>	Sheathed hardwire tails or male/female connectors
<b>Control</b>	0-10V/1-10V/DMX/DALI
<b>Drive over</b>	EN 60598-2-13:2006+A1:2012 (Static load, Torque and Shear load testing)
<b>IK Rating</b>	IEC 62262:2010/IK08

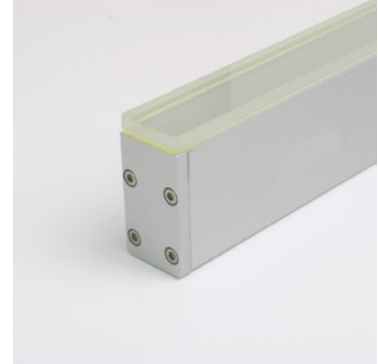

### LED Grading Key

#### Exclusive Grade

**s** **s-line\***  
2-step CCT range

\*KKDC tuned  
CCT range



#### Base Grade

**k** **k-line**  
3-step commercial range  
Energy Star CCTs

<b>Power consumption</b>	<b>Supply voltage</b>	<b>Supply current</b>
7W/m (2.13W/ft)	24V DC	0.29A/m (0.09A/ft)

### Performance Data (3000K)

	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14		
<b>k-line</b>	88	92	96	89	87	89	94	80	50	81	88	65	89	97		
	<b>Frosted</b>															
													<b>CRI</b>	<b>R9</b>	<b>Rf</b>	<b>Rg</b>
<b>s-line</b>	145lm/m (44lm/ft) 20.7lm/W											91	51	-	-	
<b>k-line</b>	137lm/m (42lm/ft) 19.5lm/W											90	50	-	-	

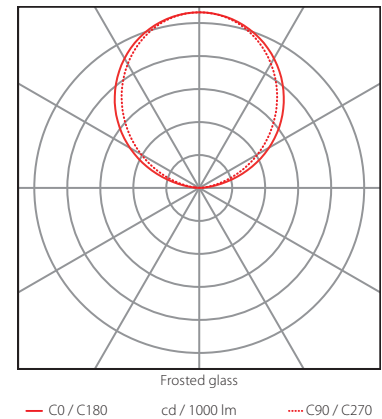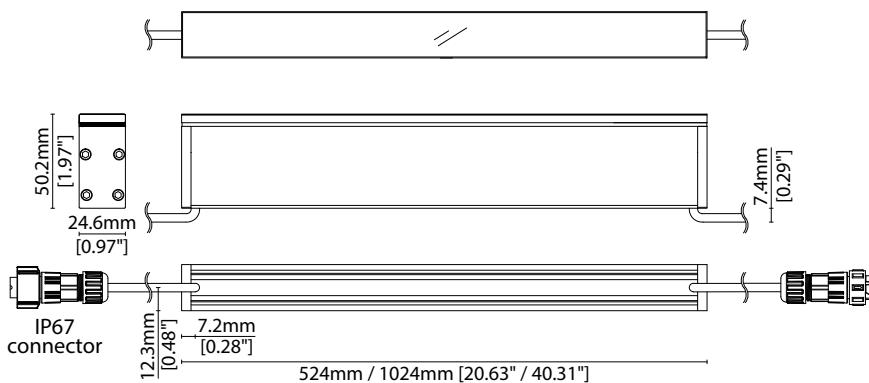

Data derived from independent UKAS / IESNA LM-79-08 accredited testing of production samples.

### FIXTURE

Model	Finish	Cover <sup>1</sup>	Grade <sup>2</sup>	LED	Colour (CCT)	Length Availability <sup>3</sup>	IP	Cable Length	Power Feed <sup>4</sup>	Input						
MOMO Bloc	Silver Anodised	SA Frosted Glass	M	s	R007	2300K (2100K PCB) <sup>6</sup>	m 524/1024mm i 20.63/40.31in	IP67	67	300mm/ 11.81"	0300	Single ø4.3mm sheath tail	S00A	DC 24V	g	
					R007	3000K (2500K PCB) <sup>6</sup>				1000mm/ 39.37"	1000	Double ø4.3mm sheath tail	D00A			
	Hard Anodised <sup>5</sup>	HA	M	s	R007	3400K (2700K PCB) <sup>6</sup>		IP67	67				Single ø4.3mm sheath IP67 connector	S67A		
					R007	4000K (3000K PCB) <sup>6</sup>							Double ø4.3mm sheath IP67 connector	D67A		
					R007	4100K (3200K PCB) <sup>6,7</sup>										
					RED	RED								s-only		
					GREEN	GRN										
BLUE	BLU															
ORANGE	ORN															
AMBER	AMB															

<sup>1</sup> Refer to **Cover/Lens Options** on **Options** pages

<sup>2</sup> Refer to **LED Grading Key** on **Specification sheet** page

<sup>3</sup> Refer to **Length Availability List** or enter total run length instead of length code

<sup>4</sup> Refer to **Power Feed Options** on **Options** pages

<sup>5</sup> Hard anodised finish reduces light output by an average of 30%

<sup>6</sup> Actual colour temperature after colour shift caused by silicone potting

<sup>7</sup> 4100K (3200K PCB) is only available in k-line

### Code Example:

BL	-	SA	-	M	-	s	-	R007	-	40	-	m	524	-	67	-	0300	-	D00A	-	g
MOMO Bloc		Silver Anodised		Frosted Glass		s		R007		4000K (3000K PCB)		524mm		IP67		300mm/11.81"		Double ø4.3mm sheath tail		DC 24V	

### ACCESSORIES

#### Mounting Accessories

KKBG-01	Ground box 01
KKBG-02	Ground box 02
KKBG-03	Ground box 03

\* Refer to **Mounting accessories** on **Accessories** pages

#### Connection Accessories

CN67-2P-0300	IP67 2 PIN male & female 300mm/11.81" pair
CN67-2P-1000	IP67 2 PIN male & female 1000mm/39.37" pair
CN67-2P-3000	IP67 2 PIN male & female 3000mm/118.11" pair

\* Refer to **Power feed** on **Accessories** pages

#### Exterior Junction Boxes

KKJB-07	IP67 Slim J-Box
KKJB-07R	Potting Resin for IP67 Slim J-Box

\* Refer to **Exterior Junction Boxes** on **Accessories** pages

#### PSU/Driver

0-10V/1-10V/DALI/DMX

\* Refer to **Driver/PSU Options** page for details or provide requirement and KKDC to offer the suitable option

### LED ENGINE VARIANTS (LED STRIP TYPE)

Colour	LED	Lumen/m	Lumen/ft	W/m	W/ft	Spec Doc	Length
Single CCT	R007	145	44	7	2.13	MOMO Bloc R007	524/1024mm (20.63/40.31in)
	R014	300	91	14	4.27	MOMO Bloc R014	524/1024mm (20.63/40.31in)
	R020	444	135	20	6.10	MOMO Bloc R020	524/1024mm (20.63/40.31in)
RGB	501	Red 30 Green 88 Blue 14 RGB 127	Red 9 Green 27 Blue 4 RGB 39	15.6	4.75	MOMO Bloc RGB	524/1024mm (20.63/40.31in)

\* Performance data: s-line, frosted glass, 3000K

# MOMO Bloc R007

## Length Availability List




Length Code		Fixture Length <sup>1</sup>		LED Strip <sup>2</sup>		End Cap Dimension <sup>3</sup>		Wattage (W)	Output (lm)
Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)		3000K (Test Data)
m0520	i0020	524mm	20.63in	500mm	19.69in	10mm	0.39in	3.50	68
m1020	i0040	1024mm	40.31in	1000mm	39.37in	10mm	0.39in	7.00	137

<sup>1</sup> Actual total overall length of light fixture (LED strip + end caps + void/wire hole)

<sup>2</sup> Actual length of PCB strip

<sup>3</sup> Actual length of 2x end caps

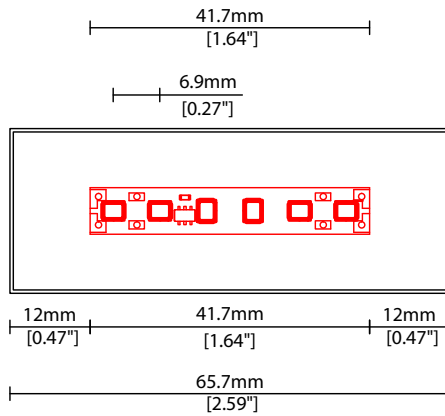


Linear

# MOMO Bloc R007 Options



## COVER/LENS OPTIONS


\* Options are an integral part of the fixture ordering codes. Please refer to **Code Table** pages.




**M** Frosted Glass Cover  
W24.6/H50.2mm (W0.97/H1.97")

### POWER FEED OPTIONS


0300 S00A 300mm (11.81") Single Ø4.3mm sheath tail




0300 D00A 300mm (11.81") Double Ø4.3mm sheath tail




0300 S67A 300mm (11.81") Single Ø4.3mm sheath connector IP67 (Premoulded)




0300 D67A 300mm (11.81") Double Ø4.3mm sheath connector IP67 (Premoulded)




1000 S00A 1000mm (39.37") Single Ø4.3mm sheath tail




1000 D00A 1000mm (39.37") Double Ø4.3mm sheath tail



1000 S67A 1000mm (39.37") Single Ø4.3mm sheath connector IP67 (Premoulded)



1000 D67A 1000mm (39.37") Double Ø4.3mm sheath connector IP67 (Premoulded)

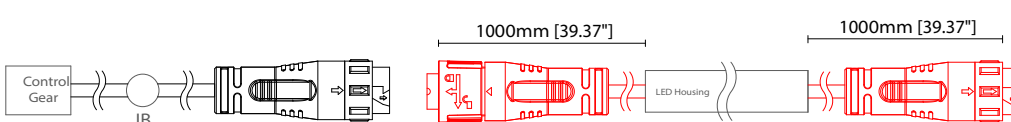

#### Key

Control Gear Power supply, sub-controllers & control systems

JB Junction box / cable connection

Linear


# MOMO Bloc R007

## Options


# KKDC

### POWER FEED OPTIONS (CONTINUED)

#### 2 Pin Female Connector IP67 (Premoulded)

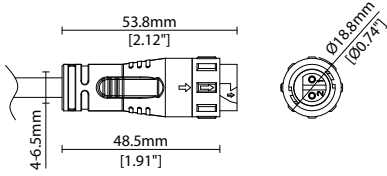

#### 2 Pin Male Connector IP67 (Premoulded)

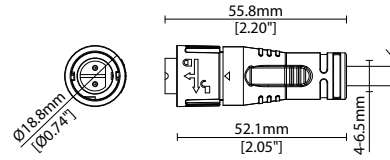


### MOUNTING ACCESSORIES


Note: Accessories are to be ordered separately with corresponding code shown below.




**KKBG-01** \*  
 Ground box 01  
 Stainless steel finish  
 W79.1/H76.5mm (W3.11/H3.01")  
 \* Specify length to match BLOC

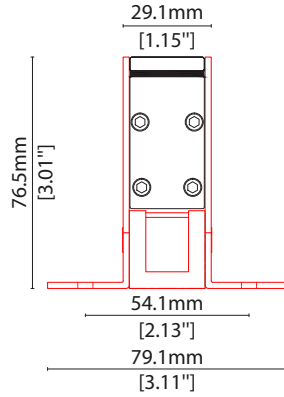


**KKBG-02** \*  
 Ground box 02  
 Stainless steel finish  
 W54.1/H76.5mm (W2.13/H3.01")  
 \* specify length to match BLOC

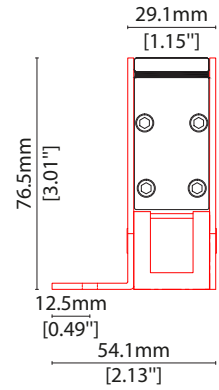


**KKBG-03** \*  
 Ground box 03  
 Stainless steel finish  
 W29.1/H76.5mm (W1.15/H3.01")  
 \* specify length to match BLOC



### POWER FEED



**CN67-2P-0300** 300mm (11.81in) pair  
**CN67-2P-1000** 1000mm (39.37in) pair  
 IP67  
 2 PIN male + female connector set



**CN67-2P-3000** 3000mm (118.11in) pair  
 IP67  
 2 PIN male + female connector set



### EXTERIOR JUNCTION BOXES



**KKJB-07**

IP67 Slim J-Box  
(including type A,B,C, D bushings)



**KKJB-07R**

Potting resin for IP67 Slim J-Box

### KKDC CONTROL



**KKDM-06** 1-10V

visDIM dimmable sub-controller  
(4 x 8A max @ 12-36V)

IP20  
Plastic housing  
L170/W59/H29mm  
(L6.69/W2.32/H1.14in)



**KKSC-05** DMX

visDIM dimmable sub-controller  
(4 x 5A max @ 12-36V)

IP20  
Plastic housing  
L170/W53.4/H28mm  
(L6.69/W2.10/H1.10in)



**KKDL-02** DALI

visDIM dimmable sub-controller  
(4 x 8A max @ 12-36V)

IP20  
Plastic housing  
L170/W59/H29mm  
(L6.69/W2.32/H1.14in)



**KKDL-03** DALI

visDIM dimmable sub-controller  
(4 x 5A max @ 12-36V)

IP20  
Plastic housing  
L166/W53.4/H23mm  
(L6.54/W2.10/H0.91in)

### AVAILABLE PSU OPTIONS

Control Mode	PSU (Order Code)	Input Voltage AC	Output Voltage DC	Rated Output Current	Rated Power	Dim %	IP Rating
Switched	CEN-60-24	90-295V	24V	2.5A	60W	-	IP67
	HLG-60H-24	90-305V	24V	2.5A	60W	-	IP67
	HLG-100H-24	90-305V	24V	4.0A	100W	-	IP67
	HLG-150H-24	90-305V	24V	6.3A	150W	-	IP67
	HLG-240H-24	90-305V	24V	10A	240W	-	IP67
0-10V (1-10V)	PWM-40-24	90-305V	24V	1.67A	40W	100-0.15 (100-10)	IP67
	PWM-60-24	90-305V	24V	2.5A	60W	100-0.15 (100-10)	IP67
	PWM-90-24	90-305V	24V	3.67A	90W	100-0.15 (100-10)	IP67
	PWM-120-24	90-305V	24V	5.0A	120W	100-0.15 (100-10)	IP67
DALI	LIN100A1	120-277V	24V	1A per channel	100W	100-0.1	IP66/IP40
DMX RGB	LIN100A1	120-277V	24V	1.33A per channel	100W	100-0.1	IP66/IP40
DMX RGBW	LIN100A1	120-277A	24V	1A per channel	100W	100-0.1	IP66/IP40

### Flicker Free Options - Combination of PSU+ sub-controller

Control Mode	PSU (Order Code)	Sub-controller (Order Code)	Input Voltage AC	Output Voltage DC	Rated Output Current	Rated Power	Dim %	IP Rating PSU/ Sub-controller
0-10V or 1-10V	CEN-60-24	KKDM-06	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-60H-24	KKDM-06	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-100H-24	KKDM-06	90-295V	24V	4.0A	100W	100-0.9	IP67/IP20
	HLG-150H-24	KKDM-06	90-295V	24V	6.3A	150W	100-0.9	IP67/IP20
	HLG-240H-24	KKDM-06	90-295V	24V	10.0A	240W	100-0.9	IP67/IP20
DALI	CEN-60-24	KKDL-02/03	90-295V	24V	2.5A	60W	100-0.1	IP67/IP20
	HLG-60H-24	KKDL-02/03	90-305V	24V	2.5A	60W	100-0.1	IP67/IP20
	HLG-100H-24	KKDL-02/03	90-305V	24V	4.0A	100W	100-0.1	IP67/IP20
	HLG-150H-24	KKDL-02/03	90-305V	24V	6.3A	150W	100-0.1	IP67/IP20
	HLG-240H-24	KKDL-02/03	90-305V	24V	10.0A	240W	100-0.1	IP67/IP20
DMX RGB	CEN-60-24	KKSC-05	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-60H-24	KKSC-05	90-305V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-100H-24	KKSC-05	90-305V	24V	4A	100W	100-0.9	IP67/IP20
	HLG-150H-24	KKSC-05	90-305V	24V	6.3A	150W	100-0.9	IP67/IP20
	HLG-240H-24	KKSC-05	90-305V	24V	10.0A	240W	100-0.9	IP67/IP20

<sup>1</sup> The items shown above cover the most frequently used specification but does not exhaust the possible options

<sup>2</sup> PSU and/or driver can be chosen from the table, or KKDC may recommend the best option upon receipt of the controls requirement and installation environment

<sup>3</sup> Electrical shop drawing will include detailed information of PSU and relevant control drivers

<sup>4</sup> Cut sheets are available on the controls section of [www.kkdc.lighting](http://www.kkdc.lighting) or upon request