


# Sheathed Cables

## Specification sheet



IP67 CE

<b>Relevant products</b>	DUO Luna
	DUO Luna RGB
	QUADRO Luna
	KURV Groove/KURV-X/KURV-Y
	KOH 40-S/40-R/40-H
	MIMI/MIMI SL/MIMI Poki/MOMO/MOMO Bloc/MOMO-L/MOMO-R/PUK-L/TIMI Cove/TAYO Micro sheathed tails
	MOMO-F/MOMO Sauna/SEN/SEN-F/SEN Louvre/TAYO Ceiling/TAYO Spot sheathed tails
	SEN-CV/SEN-F CV/SEN Louvre CV

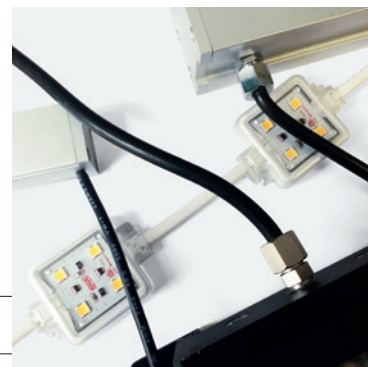

### PRODUCT SPECIFICATION

**1. Subj. 758, Section 2, Page 2464, Style 2464,  
Multiple-conductor cable using non-integral jacket**

**2. Subj. 758, Section 2, Page 2517, Style 2517**

<b>Rating</b>	UL 2464 -80°C (176°F), 300 Vac, Cable flame UL 2517 -105°C (221°F), 300 Vac, Cable flame
<b>Insulated Conductor Assembly</b>	Labelled or complying with manufacturer's AWM Procedure Two or more singles, twisted pairs of groups of twisted singles twisted together or singles or groups of singles may be laid parallel to form flat, oval or round cable. Lay not specified. Barrier layer and/or fillers optional. Manufacturer shall maintain a complete description of each assembly. May use same or mixed AWG size.
<b>Covering Shield Jacket Braid Standard Marking Use</b>	Optional None Extruded PVC Optional Appliance Wiring Material UL 758 General Internal wiring or external interconnection of electronic equipment

<b>Cable Thickness</b>	DUO Luna 18AWG 2 core
	DUO Luna RGB 18AWG 4 core
	QUADRO Luna 18AWG 2 core
	KURV-Y 22AWG 2 Core
	KOH 40-S/40-R/40-H AWG18 & AWG22 5 core
	KURV Groove/MIMI/MIMI SL/MIMI Poki/KURV-X/MOMO/MOMO-BLOC/MOMO-L/MOMO-R/PUK-L/TIMI Cove/TAYO Micro sheathed tails 22AWG/24AWG 2 core/4 core/5 core
	MOMO-F/MOMO Sauna/SEN/SEN-F/SEN Louvre/TAYO Ceiling/TAYO Spot sheathed tails 20AWG 2 core/4 core
	SEN CV/SEN-F CV/SEN Louvre CV sheathed tails 18AWG 2 core

<b>Outer Dimensions</b>	Duo Luna	5.5 x 3.5mm (0.2mm tolerance) elliptical 0.22 x 0.14in (0.01in tolerance) elliptical
	Duo Luna RGB	8.0 x 3.5mm (0.2mm tolerance) elliptical 0.32 x 0.14in (0.01in tolerance) elliptical
	Quadro Luna	5.5 x 3.5mm (0.2mm tolerance) elliptical 0.22 x 0.14in (0.01in tolerance) elliptical
	KURV-Y	Ø3.4-3.6mm (0.13- 0.14 in)
	KOH 40-S/40-R/40-H sheathed tails	Ø6.5-7.1mm (0.3mm tolerance) Ø0.26-0.28in (0.01in tolerance)
	KURV Groove/MIMI/MIMI SL/MIMI Poki/KURV-X/MOMO/MOMO Bloc/MOMO-L/MOMO-R/PUK-L/TIMI Cove/TAYO Micro sheathed tails	Ø4.3-4.5mm (0.17- 0.18 in)
	MOMO-L/MOMO-R/MOMO-F RGBW	Ø5.5 (0.21 in)
	MOMO-F/MOMO Sauna/SEN/SEN-F/SEN Louvre/TAYO Ceiling/TAYO Spot sheathed tails	Ø6.3-6.5mm (0.25-0.26in)
	SEN CV/SEN-F CV/SEN Louvre CV sheathed tails	Ø6.3-6.5mm (0.25-0.24in)



# Sheathed Cables


## Specification sheet



**CN67-2P-0300** (300mm (11.8in) pair) IP67 2 PIN male + female connector set

**CN67-2P-1000** (1000mm (39.4in) pair) IP67 2 PIN male + female connector set

**CN67-2P-3000** (3000mm (118.1in) pair) IP67 2 PIN male + female connector set

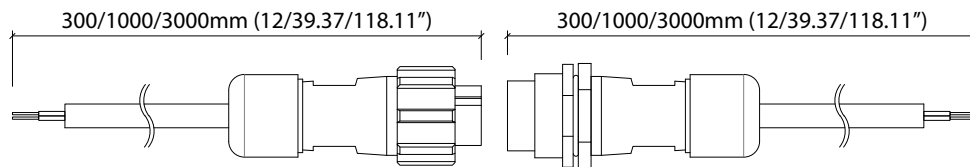

**CN67-4P-0300** (300mm (11.8in) pair) IP67 4 PIN RGB/LEDmix male + female connector set

**CN67-4P-1000** (1000mm (39.4in) pair) IP67 4 PIN RGB/LEDmix male + female connector set

**CN67-4P-3000** (3000mm (118.1in) pair) IP67 4 PIN RGB/LEDmix male + female connector set

