

Linear

# TANA R014 (x2) Fixture Guide

# KKDÖ

Indoor | Surface | Output up to 1751lm/m (534lm/ft)




## Key applications

- ✓ Architectural detail
- ✓ Cabinet & furniture
- ✓ Direct lighting
- ✓ Display case
- ✓ Interior
- ✓ Retail display
- ✓ Shelving display

## Key features


- ✓ Custom lengths
- ✓ Constant Voltage (CV)
- ✓ Continuous light runs
- ✓ Diffusion: homogenous
- ✓ Extensive CCT range
- ✓ IP40 dry area

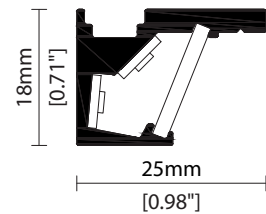

## FIXING METHODS



SF Screw fixing



TF 3M tape fixing



MF Magnet fixing

Linear

# TANA R014 (x2)

## Specification sheet



<b>Dimensions</b>	H18/W25/L103-2020mm (H0.71/W0.98/L4.05-79.53in)
<b>PCB Cut-point</b>	41.7mm increment/2000mm max (1.64in increment/78.74in max)
<b>LED Pitch</b>	6.95mm-288LED/m (0.27in - 88LED/ft)
<b>Chip</b>	<b>s-line</b> <b>k-line</b>
<b>Cover/Optics</b>	Diffused (110°)/Clear @ 45 degree position (90°)/Clear @ 5 degree position (50°)
<b>CCT</b>	<b>s-line:</b> 1900K/2100K/2300K/2500K/2700K/3000K/3500K/4000K/5000K Single colours: Red/Green/Blue/Orange/Amber <b>k-line:</b> 1900K/2100K/2300K/2500K/2700K/3000K/3500K/4000K/5000K
<b>LED binning</b>	<b>s-line:</b> 2-step MacAdam ellipse <b>k-line:</b> 3-step MacAdam ellipse
<b>CRI</b>	≥93
<b>Lifetime</b>	50,000 hours @ 25°C (50,000 hours @ 77°F)
<b>Operating temp</b>	T <sub>a</sub> = -25 to 50°C (T <sub>c</sub> max = 63.5°C) T <sub>a</sub> = -13 to 140°F (T <sub>c</sub> max = 146°F)
<b>IP Rating</b>	IP40
<b>Finish</b>	Silver anodised
<b>Mounting</b>	Surface mounting via screw fixing, 3M tape or magnets
<b>Power feed</b>	Hardwire tails or male/female connectors
<b>Control</b>	0-10V/1-10V/DMX/DALI



### LED Grading Key

#### Exclusive Grade

<b>s</b> <b>s-line*</b>	*KKDC tuned CCT range
2-step CCT range	

#### Base Grade



<b>k</b> <b>k-line</b>	3-step commercial range Energy Star CCTs
------------------------	---

<b>Power consumption</b>	<b>Supply voltage</b>	<b>Supply current</b>
28W/m (8.53W/ft)	24V DC	1.17A/m (0.36A/ft)

### Performance Data (3000K)

	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14					
<b>k-line</b>	94	97	98	92	93	95	92	84	66	92	92	75	95	99					
	<b>Clear Cover</b>												<b>Diffused Cover</b>			<b>CRI</b>	<b>R9</b>	<b>Rf</b>	<b>Rg</b>
<b>s-line</b>	1751lm/m (534lm/ft) 62.5lm/W												1365lm/m (416lm/ft) 48.8lm/W			94	67	-	-
<b>k-line</b>	1652lm/m (504lm/ft) 59lm/W												1288lm/m (393lm/ft) 46lm/W			93	66	-	-

### Hardwire Tails

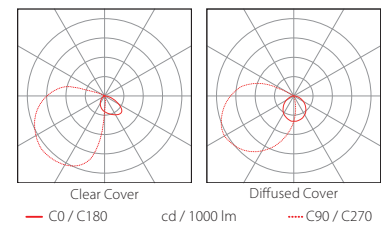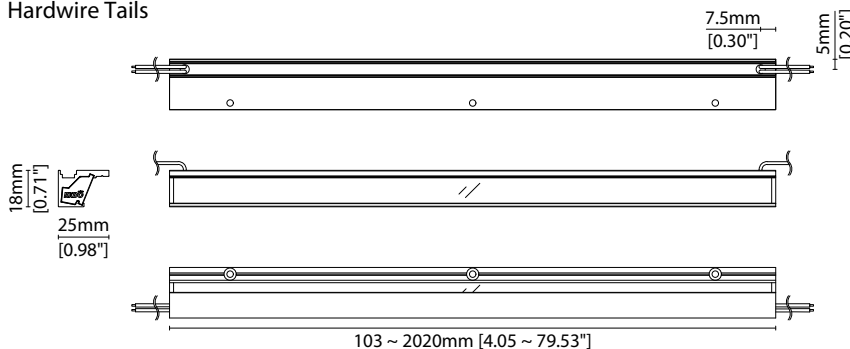

45° & 5° LED position

Data derived from independent UKAS / IESNA LM-79-08 accredited testing of production samples.

# TANA R014 (x2) Code Table



## FIXTURE

Model	Finish	Cover <sup>1</sup>	Grade <sup>2</sup>	LED	Colour (CCT)	Length Availability <sup>3</sup>	IP	Cable Length	Power Feed <sup>4</sup>	Fixing <sup>5</sup>	Input
TANA	TN Silver Anodised	SA Clear Diffused	B C s k	R014 R014	1900K 19 2100K 21 3200K 32 2500K 25 2700K 27 3000K 30 3500K 35 4000K 40 5000K 50  RED RED GREEN GRN BLUE BLU ORANGE ORN AMBER AMB	m 103.3-2020mm 83.3mm increments  i 4.07-79.53in 3.28in increments  (Specify length code OR total run length)	IP40 40	50mm/1.97" 0050  1000mm/39.37" 1000  3000mm/118.11" 3000	Single no sheath tail S00X  Double no sheath tail D00X  Single no sheath IP20 connector S20X  Double no sheath IP20 connector D20X	Screw SF 3M Tape TF Magnet MF	DC 24V g

<sup>1</sup> Refer to **Cover Options** on **Options** pages    <sup>2</sup> Refer to **LED Grading Key** on **Specification sheet** page    <sup>3</sup> Refer to **Length Availability List** or enter total run length instead of length code  
<sup>4</sup> Refer to **Power Feed Options** on **Options** pages    <sup>5</sup> Refer to **Fixing Options** on **Options** pages

### Code Example:

TN	-	SA	-	C	-	s	-	R014	-	35	-	m	-	520	-	40	-	1000	-	S00X	-	SF	-	g
TANA		Silver Anodised		Diffused		s		R014		3500K		m		520mm		IP40		1000mm/39.37"		Single no sheath tail		Screw		DC 24V

## ACCESSORIES

### Connection Accessories

KKCN-02	2 PIN male & female JST 50mm (1.97in) pair
KKCN-04	2 PIN male & female JST 300mm (11.81in) pair
KKCN-05	2 PIN JST 300mm (11.81in) extension lead

### PSU/Driver

0-10V/1-10V/DALI/DMX
* Refer to <b>Driver/PSU Options</b> page for details or provide requirement and KKDC to offer the suitable option

\* Refer to **Power feed** on **Accessories** pages

## LED ENGINE VARIANTS (LED STRIP TYPE)

Colour	LED	Lumen/m	Lumen/ft	W/m	W/ft	Spec Doc	Length	Increment
Single CCT	R007	534	163	7	2.13	TANA R007	103-2020mm (4.05-79.53in)	41.7mm (1.64in)
	R014	1098	335	14	4.27	TANA R014	103-2020mm (4.05-79.53in)	41.7mm (1.64in)
	R020	1569	478	20	6.10	TANA R020	103-2020mm (4.05-79.53in)	41.7mm (1.64in)
	<b>2 R014</b>	<b>1751</b>	<b>534</b>	<b>28</b>	<b>8.53</b>	<b>TANA R014 (x2)</b>	<b>103-2020mm (4.05-79.53in)</b>	<b>41.7mm (1.64in)</b>
Warm Dim/Dynamic White	R207	1221	372	16	4.88	TANA R207	103-2020mm (4.05-79.53in)	83.3mm (3.28in)
RGB	501	Red 119 Green 257 Blue 42 RGB 372	Red 36 Green 78 Blue 13 RGB 113	15.6	4.75	TANA RGB	103-2020mm (4.05-79.53in)	83.3mm (3.28in)

\* Performance data: s-line, clear cover, 3000K

Linear

# TANA R014 (x2) Length Availability List



Length Code		Fixture Length <sup>1</sup>		LED Strip <sup>2</sup>		End Cap Dimension <sup>3</sup>		Wattage (W)	Output (lm)
Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)		3000K (Test Data)
m0103	i0004	103mm	4.07in	83mm	3.28in	0mm	0.00in	2.33	135
m0145	i0006	145mm	5.71in	125mm	4.92in	0mm	0.00in	3.50	203
m0187	i0007	187mm	7.35in	167mm	6.56in	0mm	0.00in	4.67	271
m0228	i0009	228mm	8.99in	208mm	8.20in	0mm	0.00in	5.83	338
m0270	i0011	270mm	10.63in	250mm	9.84in	0mm	0.00in	7.00	406
m0312	i0012	312mm	12.27in	292mm	11.48in	0mm	0.00in	8.17	474
m0353	i0014	353mm	13.91in	333mm	13.12in	0mm	0.00in	9.33	541
m0395	i0016	395mm	15.55in	375mm	14.76in	0mm	0.00in	10.50	609
m0437	i0017	437mm	17.19in	417mm	16.40in	0mm	0.00in	11.67	677
m0478	i0019	478mm	18.83in	458mm	18.04in	0mm	0.00in	12.83	744
m0520	i0020	520mm	20.47in	500mm	19.69in	0mm	0.00in	14.00	812
m0562	i0022	562mm	22.11in	542mm	21.33in	0mm	0.00in	15.17	880
m0603	i0024	603mm	23.75in	583mm	22.97in	0mm	0.00in	16.33	947
m0645	i0025	645mm	25.39in	625mm	24.61in	0mm	0.00in	17.50	1015
m0687	i0027	687mm	27.03in	667mm	26.25in	0mm	0.00in	18.67	1083
m0728	i0029	728mm	28.67in	708mm	27.89in	0mm	0.00in	19.83	1150
m0770	i0030	770mm	30.31in	750mm	29.53in	0mm	0.00in	21.00	1218
m0812	i0032	812mm	31.96in	792mm	31.17in	0mm	0.00in	22.17	1286
m0853	i0034	853mm	33.60in	833mm	32.81in	0mm	0.00in	23.33	1353
m0895	i0035	895mm	35.24in	875mm	34.45in	0mm	0.00in	24.50	1421
m0937	i0037	937mm	36.88in	917mm	36.09in	0mm	0.00in	25.67	1489
m0978	i0039	978mm	38.52in	958mm	37.73in	0mm	0.00in	26.83	1556
m1020	i0040	1020mm	40.16in	1000mm	39.37in	0mm	0.00in	28.00	1624
m1062	i0042	1062mm	41.80in	1042mm	41.01in	0mm	0.00in	29.17	1692
m1103	i0043	1103mm	43.44in	1083mm	42.65in	0mm	0.00in	30.33	1759
m1145	i0045	1145mm	45.08in	1125mm	44.29in	0mm	0.00in	31.50	1827
m1187	i0047	1187mm	46.72in	1167mm	45.93in	0mm	0.00in	32.67	1895
m1228	i0048	1228mm	48.36in	1208mm	47.57in	0mm	0.00in	33.83	1962
m1270	i0050	1270mm	50.00in	1250mm	49.21in	0mm	0.00in	35.00	2030
m1312	i0052	1312mm	51.64in	1292mm	50.85in	0mm	0.00in	36.17	2098
m1353	i0053	1353mm	53.28in	1333mm	52.49in	0mm	0.00in	37.33	2165
m1395	i0055	1395mm	54.92in	1375mm	54.13in	0mm	0.00in	38.50	2233
m1437	i0057	1437mm	56.56in	1417mm	55.77in	0mm	0.00in	39.67	2301
m1478	i0058	1478mm	58.20in	1458mm	57.41in	0mm	0.00in	40.83	2368
m1520	i0060	1520mm	59.84in	1500mm	59.06in	0mm	0.00in	42.00	2436
m1562	i0061	1562mm	61.48in	1542mm	60.70in	0mm	0.00in	43.17	2504
m1603	i0063	1603mm	63.12in	1583mm	62.34in	0mm	0.00in	44.33	2571
m1645	i0065	1645mm	64.76in	1625mm	63.98in	0mm	0.00in	45.50	2639
m1687	i0066	1687mm	66.40in	1667mm	65.62in	0mm	0.00in	46.67	2707
m1728	i0068	1728mm	68.04in	1708mm	67.26in	0mm	0.00in	47.83	2774
m1770	i0070	1770mm	69.69in	1750mm	68.90in	0mm	0.00in	49.00	2842
m1812	i0071	1812mm	71.33in	1792mm	70.54in	0mm	0.00in	50.17	2910
m1853	i0073	1853mm	72.97in	1833mm	72.18in	0mm	0.00in	51.33	2977

Linear

# TANA R014 (x2) Length Availability List




Length Code		Fixture Length <sup>1</sup>		LED Strip <sup>2</sup>		End Cap Dimension <sup>3</sup>		Wattage (W)	Output (lm)
Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)		3000K (Test Data)
m1895	i0075	1895mm	74.61in	1875mm	73.82in	0mm	0.00in	52.50	3045
m1937	i0076	1937mm	76.25in	1917mm	75.46in	0mm	0.00in	53.67	3113
m1978	i0078	1978mm	77.89in	1958mm	77.10in	0mm	0.00in	54.83	3180
m2020	i0080	2020mm	79.53in	2000mm	78.74in	0mm	0.00in	56.00	3248

<sup>1</sup> Actual total overall length of light fixture (LED strip + end caps + void/wire hole)

<sup>2</sup> Actual length of PCB strip

<sup>3</sup> Actual length of 2x end caps

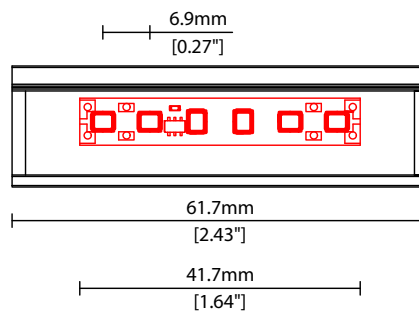



Linear

# TANA R014 (x2) Options

# KKDÖ


## LED POSITION OPTION

\* Options are an integral part of the fixture ordering codes. Please refer to **Code Table** pages.

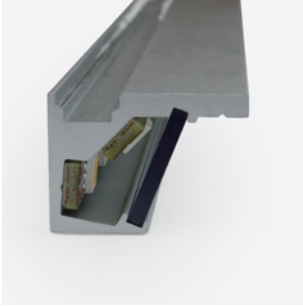


5° & 45° LED position  
TANA R014 (x2) only

## COVER OPTIONS




**B** Clear cover  
Polycarbonate





**C** Diffused cover  
Polycarbonate

## FIXING OPTIONS





**SF** Screw fixing

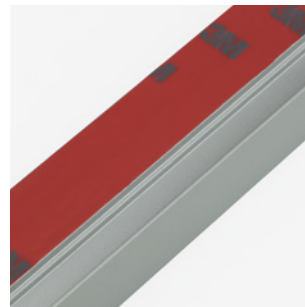

**TF** 3M tape fixing


### FIXING OPTIONS (CONTINUED)




MF Magnet fixing

### POWER FEED OPTIONS


0050 S20X 50mm (1.97") Single IP20 connector




0050 D20X 50mm (1.97") Double IP20 connector




1000 S00X 1000mm (39.37") Single tail




1000 D00X 1000mm (39.37") Double tail



1000 S20X 1000mm (39.37") Single IP20 connector



1000 D20X 1000mm (39.37") Double IP20 connector




#### Key

Control Gear Power supply, sub-controllers & control systems


JB Junction box / cable connection

**POWER FEED OPTIONS (CONTINUED)**


3000 S00X 3000mm (118.11") Single tail




3000 D00X 3000mm (118.11") Double tail




3000 S20X 3000mm (118.11") Single IP20 connector





3000 D20X 3000mm (118.11") Double IP20 connector



**JST 2 Pin Female Connector**



**JST 2 Pin Male Connector**






Linear

# TANA R014 (x2) Accessories


# KKDC

## POWER FEED

Note: Accessories are to be ordered separately with corresponding code shown below.



**KKCN-02** 50mm (1.97in) pair  
**KKCN-04** 300mm (11.81in) pair  
2 PIN male + female JST connector set



**KKCN-05**  
2 PIN 300mm (11.81in) extension lead (JST)

## KKDC CONTROL



IP20  
Plastic housing  
L170/W59/H29mm  
(L6.69/W2.32/H1.14in)

**KKDM-06** 1-10V  
visDIM dimmable sub-controller  
(4 x 8A max @ 12-36V)



IP20  
Plastic housing  
L170/W53.4/H28mm  
(L6.69/W2.10/H1.10in)

**KKSC-05** DMX  
visDIM dimmable sub-controller  
(4 x 5A max @ 12-36V)




IP20  
Plastic housing  
L170/W59/H29mm  
(L6.69/W2.32/H1.14in)

**KKDL-02** DALI  
visDIM dimmable sub-controller  
(4 x 8A max @ 12-36V)



IP20  
Plastic housing  
L166/W53.4/H23mm  
(L6.54/W2.10/H0.91in)

**KKDL-03** DALI  
visDIM dimmable sub-controller  
(4 x 5A max @ 12-36V)



# TANA

## Driver/PSU Options



### AVAILABLE PSU OPTIONS

Control Mode	PSU (Order Code)	Input Voltage AC	Output Voltage DC	Rated Output Current	Rated Power	Dim %	IP Rating
Switched	CEN-60-24	90-295V	24V	2.5A	60W	-	IP67
	HLG-60H-24	90-305V	24V	2.5A	60W	-	IP67
	HLG-100H-24	90-305V	24V	4.0A	100W	-	IP67
	HLG-150H-24	90-305V	24V	6.3A	150W	-	IP67
	HLG-240H-24	90-305V	24V	10A	240W	-	IP67
0-10V (1-10V)	PWM-40-24	90-305V	24V	1.67A	40W	100-0.15 (100-10)	IP67
	PWM-60-24	90-305V	24V	2.5A	60W	100-0.15 (100-10)	IP67
	PWM-90-24	90-305V	24V	3.67A	90W	100-0.15 (100-10)	IP67
	PWM-120-24	90-305V	24V	5.0A	120W	100-0.15 (100-10)	IP67
DALI	LIN100A1	120-277V	24V	1A per channel	100W	100-0.1	IP66/IP40
DMX RGB	LIN100A1	120-277V	24V	1.33A per channel	100W	100-0.1	IP66/IP40
DMX RGBW	LIN100A1	120-277A	24V	1A per channel	100W	100-0.1	IP66/IP40

### Flicker Free Options - Combination of PSU+ sub-controller

Control Mode	PSU (Order Code)	Sub-controller (Order Code)	Input Voltage AC	Output Voltage DC	Rated Output Current	Rated Power	Dim %	IP Rating PSU/ Sub-controller
0-10V or 1-10V	CEN-60-24	KKDM-06	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-60H-24	KKDM-06	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-100H-24	KKDM-06	90-295V	24V	4.0A	100W	100-0.9	IP67/IP20
	HLG-150H-24	KKDM-06	90-295V	24V	6.3A	150W	100-0.9	IP67/IP20
	HLG-240H-24	KKDM-06	90-295V	24V	10.0A	240W	100-0.9	IP67/IP20
DALI	CEN-60-24	KKDL-02/03	90-295V	24V	2.5A	60W	100-0.1	IP67/IP20
	HLG-60H-24	KKDL-02/03	90-305V	24V	2.5A	60W	100-0.1	IP67/IP20
	HLG-100H-24	KKDL-02/03	90-305V	24V	4.0A	100W	100-0.1	IP67/IP20
	HLG-150H-24	KKDL-02/03	90-305V	24V	6.3A	150W	100-0.1	IP67/IP20
	HLG-240H-24	KKDL-02/03	90-305V	24V	10.0A	240W	100-0.1	IP67/IP20
DMX RGB	CEN-60-24	KKSC-05	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-60H-24	KKSC-05	90-305V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-100H-24	KKSC-05	90-305V	24V	4A	100W	100-0.9	IP67/IP20
	HLG-150H-24	KKSC-05	90-305V	24V	6.3A	150W	100-0.9	IP67/IP20
	HLG-240H-24	KKSC-05	90-305V	24V	10.0A	240W	100-0.9	IP67/IP20

<sup>1</sup> The items shown above cover the most frequently used specification but does not exhaust the possible options

<sup>2</sup> PSU and/or driver can be chosen from the table, or KKDC may recommend the best option upon receipt of the controls requirement and installation environment

<sup>3</sup> Electrical shop drawing will include detailed information of PSU and relevant control drivers

<sup>4</sup> Cut sheets are available on the controls section of [www.kkdc.lighting](http://www.kkdc.lighting) or upon request