

Linear

# TIMI-M R207

## Fixture Guide

# KKDÖ



Indoor | Surface | Dynamic output up to 1577lm/m (481lm/ft)




### Key applications

- ✓ Architectural detail
- ✓ Backlighting & signage
- ✓ Cabinet & furniture
- ✓ Cove lighting
- ✓ Display case
- ✓ Indirect lighting
- ✓ Interior
- ✓ Mirror back lighting
- ✓ Retail display
- ✓ Shelving display
- ✓ Special effect

### Key features


- ✓ Custom lengths
- ✓ Cutable (IP20)
- ✓ Constant Voltage (CV)
- ✓ Diffusion: spoting
- ✓ Extensive CCT range
- ✓ IP20 dry area
- ✓ LEDmix dynamic white
- ✓ Lens options



### MOUNTING METHODS



KKBK-20 Steel plate



Direct attachment

## Warm dim (Dynamic white)

Output Luminance %

min DIM1 Input Level max

— CH1 (Warmer)  
— CH2 (Cooler)

**LEDmix R207**

CCT Selection 1      CCT Selection 2

**LEDmix R209**

CCT Selection 1      CCT Selection 2

LEDmix **warm dim** (Dynamic white) is a pre-programmed dimming curve setting enabling two different colour temperatures (CCTs) to blend harmoniously to achieve a warming lighting effect when dimmed.

KKDC LEDmix strips allow two separate CCT selections to be specified within the same PCB strip.

Use the table opposite to help determine which 2 CCT selections you require according to your preferred cool to warm dimming range.

*\*Note: The blended CCT is approx. 'cool-end' result at 100% brightness based on using the KKDC LED CCT specification.*

CCT Selection 1	CCT Selection 2	
	Blended CCT*	PCB CCT
1900K~	2000K 2100K 2200K 2300K 2500K 2600K 2700K 3000K 3500K	2100K PCB 2300K PCB 2500K PCB 2700K PCB 3000K PCB 3200K PCB 3500K PCB 4000K PCB 5000K PCB
2100K~	2200K 2300K 2400K 2600K 2700K 2800K 3000K 3600K	2300K PCB 2500K PCB 2700K PCB 3000K PCB 3200K PCB 3500K PCB 4000K PCB 5000K PCB
2300K~	2400K 2500K 2700K 2800K 2900K 3100K 3700K	2500K PCB 2700K PCB 3000K PCB 3200K PCB 3500K PCB 4000K PCB 5000K PCB
2500K~	2600K 2800K 2800K 3000K 3200K 3800K	2700K PCB 3000K PCB 3200K PCB 3500K PCB 4000K PCB 5000K PCB
2700K~	2900K 3000K 3100K 3400K 3900K	3000K PCB 3200K PCB 3500K PCB 4000K PCB 5000K PCB
3000K~	3100K 3300K 3500K 4000K	3200K PCB 3500K PCB 4000K PCB 5000K PCB
3200K~	3300K 3600K 4100K	3500K PCB 4000K PCB 5000K PCB
3500K~	3700K 4300K	4000K PCB 5000K PCB
4000K~	5100K	5000K PCB

## Tuneable white

Channel Mix Ratio %

min DIM1 Input Level max

— CH1 (Warmer)  
— CH2 (Cooler)

**LEDmix R207**

CCT Selection 1 CCT Selection 2


**LEDmix R209**

CCT Selection 1 CCT Selection 2

LEDmix **tunable white** enables two different LED colour temperatures (CCTs) to be specified within the same LEDmix strip.

Each CCT selection can then be independently controlled (via your dimming control system) to adjust the warm & cool light output (CCT selections) and thus tailor a blended light colour of your choosing.

CCT Selection 1	CCT Selection 2
1900K~	2100K 2300K 2500K 2700K 3000K 3200K 3500K 4000K 5000K
2100K~	2300K 2500K 2700K 3000K 3200K 3500K 4000K 5000K
2300K~	2500K 2700K 3000K 3200K 3500K 4000K 5000K
2500K~	2700K 3000K 3200K 3500K 4000K 5000K
2700K~	3000K 3200K 3500K 4000K 5000K
3000K~	3200K 3500K 4000K 5000K
3200K~	3500K 4000K 5000K
3500K~	4000K 5000K
4000K~	5000K




# TIMI-M R207

## Specification sheet



<b>Dimensions</b>	H7.7/W9.5/L97-2014mm (H0.3/W0.37/L3.81-79.29in) (Double tail) H7.7/W9.5/L90-2007mm (H0.3/W0.37/L3.54-79.01in) (Single tail)
<b>PCB Cut-point</b>	83.3mm increment/2000mm max (3.28in increment/78.74in max)
<b>LED Pitch</b>	13.9mm-144LED/m (0.55in - 44LED/ft)
<b>Chip</b>	<b>s-line</b> <b>k-line</b>
<b>Cover/Optics</b>	No cover (120°) / Semi-diffused (100°) / Black (90°) / KKLN-01D lens (14°)
<b>CCT</b>	<b>s-line:</b> 1900K/2100K/2300K/2500K/2700K/3000K/3500K/4000K/5000K <b>k-line:</b> 1900K/2100K/2300K/2500K/2700K/3000K/3500K/4000K/5000K
<b>LED binning</b>	<b>s-line:</b> 2.5-step MacAdam ellipse <b>k-line:</b> 3-step MacAdam ellipse
<b>CRI</b>	≥ 92
<b>Lifetime</b>	50,000 hours @ 25°C (50,000 hours @ 77°F)
<b>Operating temp</b>	T <sub>a</sub> = -25 to 40°C (T <sub>c</sub> max = 73.3°C) T <sub>a</sub> = -13 to 104°F (T <sub>c</sub> max = 164°F)
<b>IP Rating</b>	IP20
<b>Finish</b>	Silver anodised
<b>Mounting</b>	Surface mounting via magnet
<b>Power feed</b>	Hardwire tails or male/female connectors
<b>Control</b>	0-10V/1-10V/DMX/DALI

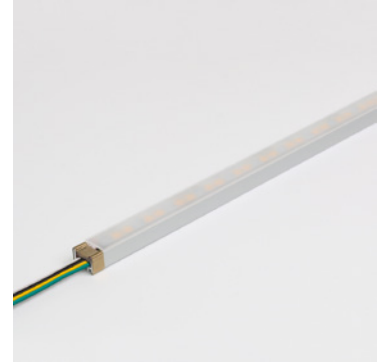

### LED Grading Key

#### Exclusive Grade

<b>s</b> s-line*	*KKDC tuned CCT range
2.5-step CCT range	

#### Base Grade



<b>k</b> k-line	3-step commercial range
	Energy Star CCTs

<b>Power consumption</b>	<b>Supply voltage</b>	<b>Supply current</b>
16W/m (4.88W/ft)	24V DC	0.67A/m (0.20A/ft)

### Performance Data (2100K+5000K)

	R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14
<b>k-line</b>	93	98	97	91	93	96	88	77	54	94	93	84	95	99

	No Cover	Semi-diffused	14° (KKLN-01)	Black cover	CRI	R9	Rf	Rg
<b>s-line</b>	1577lm/m (481lm/ft) 98.6lm/W	1289lm/m (393lm/ft) 80.6lm/W	1357lm/m (414lm/ft) 84.8lm/W	560lm/m (171lm/ft) 35.0lm/W	93	55	-	-
<b>k-line</b>	1488lm/m (454lm/ft) 93lm/W	1216lm/m (371lm/ft) 76lm/W	1280lm/m (390lm/ft) 80lm/W	528lm/m (161lm/ft) 33lm/W	92	54	-	-

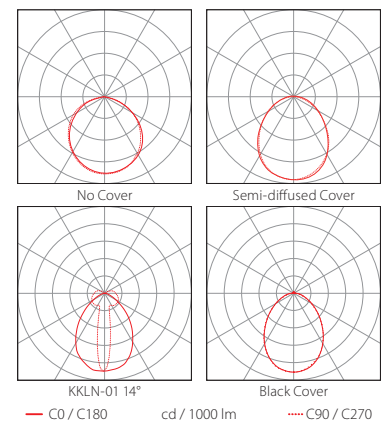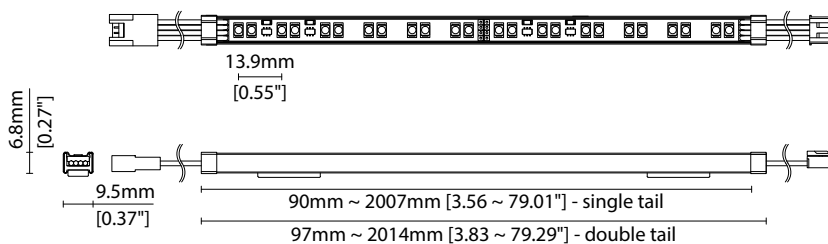

Data derived from independent UKAS/IESNA LM-79-08 accredited testing of production samples.

### FIXTURE

Model	Finish	Cover/Lens <sup>1</sup>	Grade <sup>2</sup>	LED	Colour (CCT)	Length Availability <sup>3</sup>	IP	Cable Length	Power Feed <sup>4</sup>	Input																
TIMI-M	IM	Silver Anodised	SA	No cover <sup>5</sup>	X	R207	R207	1900K	19	m	97-2014mm <sup>7</sup> 90-2007mm <sup>8</sup> 83.3mm increments	IP20	20	50mm (1.97in)	0050	Single no sheath tail	S00X	DC 24V	g							
				Semi-diffused <sup>5</sup>	D			2100K	21					i	3.81-79.29in <sup>7</sup> 3.54-79.01in <sup>8</sup> 3.28in increments					(Specify length code OR total run length)	300mm (11.81in)	0300	Double no sheath tail	D00X		
				KKLN-01D (14°) <sup>5</sup>	S			2300K	23												Single no sheath IP20 connector	S20X				
				Black cover <sup>5</sup>	Y			2500K	25																Double no sheath IP20 connector	D20X
				2700K	27																					
				3000K	30																					
				3500K	35																					
				4000K	40																					
				5000K	50																					

<sup>1</sup> Refer to **Cover/Lens Options** on **Options** pages

<sup>2</sup> Refer to **LED Grading Key** on **Specification sheet** page

<sup>3</sup> Refer to **Length Availability List** or enter total run length instead of length code

<sup>4</sup> Refer to **Power feed Options** on **Options** pages

<sup>5</sup> Operating temperatures vary for TIMI-M with cover and TIMI-M without cover; please check with a KKDC engineer if operating temperature is limiting product application

<sup>6</sup> LEDmix requires two colour temperature choices

<sup>7</sup> Double clamp TIMI-M length

<sup>8</sup> Single clamp TIMI-M length

### Code Example:

IM	-	SA	-	D	-	s	-	R207	-	2150	-	m	514	-	20	-	0050	-	D20X	-	g
TIMI-M		Silver Anodised		Semi-diffused				R207		2100K+5000K		514mm		IP20		50mm (1.97in)		Double no sheath IP20 connector		DC 24V	

### ACCESSORIES

#### Mounting Accessories

**KKBK-20** Steel plate

\* Refer to **Mounting accessories** on **Accessories** pages

#### Connection Accessories

**KKCN-18** 4 PIN LEDmix male & female 50mm (1.97in) pair

**KKCN-19** 4 PIN LEDmix male & female 300mm (11.81in) pair

**KKCN-24** 4 PIN LEDmix 300mm (11.81in) extension lead

\* Refer to **Power feed** on **Accessories** pages

#### PSU/Driver

0-10V/1-10V/DALI/DMX

\* Refer to **Driver/PSU Options** page for details or provide requirement and KKDC to offer the suitable option

### LED ENGINE VARIANTS (LED STRIP TYPE)

Colour	LED	Lumen/m	Lumen/ft	W/m	W/ft	Spec Doc	Length	Increment
Single CCT	R007	690	210	7	2.13	TIMI-M R007	97-2014mm (3.81-79.29in)	41.7mm (1.64in)
	R014	1380	421	14	4.27	TIMI-M R014	97-2014mm (3.81-79.29in)	41.7mm (1.64in)
	A010	1400	426	10	3.05	TIMI-M A010	91-2014mm (3.58-79.29in)	38.46mm (1.51in)
	A020	2800	853	20	6.10	TIMI-M A020	91-2014mm (3.58-79.29in)	38.46mm (1.51in)
<b>Warm Dim/Dynamic White</b>	<b>R207</b>	<b>690</b>	<b>210</b>	<b>16</b>	<b>4.88</b>	<b>TIMI-M R207</b>	<b>97-2014mm (3.81-79.29in)</b>	<b>83.3mm (3.28in)</b>
RGB	501	Red 150 Green 320 Blue 50 RGB 460	Red 46 Green 98 Blue 15 RGB 140	16	4.88	TIMI-M RGB	97-2014mm (3.81-79.29in)	83.3mm (3.28in)

\* Performance data: s/k-line, no cover, 2100K + 5000K

# TIMI-M R207


## Length Availability List



Length Code		Fixture Length <sup>1</sup>		LED Strip <sup>2</sup>		End Cap Dimension		Wattage (W)	Output (lm)
Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)	Metric	Imperial(US)		3000K (Test Data)
m0097	i0004	97mm	3.83in	83mm	3.28in	N/A	N/A	1.33	116
m0181	i0007	181mm	7.11in	167mm	6.56in	N/A	N/A	2.67	232
m0264	i0010	264mm	10.39in	250mm	9.84in	N/A	N/A	4.00	348
m0347	i0014	347mm	13.67in	333mm	13.12in	N/A	N/A	5.33	464
m0431	i0017	431mm	16.96in	417mm	16.40in	N/A	N/A	6.67	580
m0514	i0020	514mm	20.24in	500mm	19.69in	N/A	N/A	8.00	696
m0597	i0024	597mm	23.52in	583mm	22.97in	N/A	N/A	9.33	812
m0681	i0027	681mm	26.80in	667mm	26.25in	N/A	N/A	10.67	928
m0764	i0030	764mm	30.08in	750mm	29.53in	N/A	N/A	12.00	1044
m0847	i0033	847mm	33.36in	833mm	32.81in	N/A	N/A	13.33	1160
m0931	i0037	931mm	36.64in	917mm	36.09in	N/A	N/A	14.67	1276
m1014	i0040	1014mm	39.92in	1000mm	39.37in	N/A	N/A	16.00	1392
m1097	i0043	1097mm	43.20in	1083mm	42.65in	N/A	N/A	17.33	1508
m1181	i0046	1181mm	46.48in	1167mm	45.93in	N/A	N/A	18.67	1624
m1264	i0050	1264mm	49.76in	1250mm	49.21in	N/A	N/A	20.00	1740
m1347	i0053	1347mm	53.04in	1333mm	52.49in	N/A	N/A	21.33	1856
m1431	i0056	1431mm	56.33in	1417mm	55.77in	N/A	N/A	22.67	1972
m1514	i0060	1514mm	59.61in	1500mm	59.06in	N/A	N/A	24.00	2088
m1597	i0063	1597mm	62.89in	1583mm	62.34in	N/A	N/A	25.33	2204
m1681	i0066	1681mm	66.17in	1667mm	65.62in	N/A	N/A	26.67	2320
m1764	i0069	1764mm	69.45in	1750mm	68.90in	N/A	N/A	28.00	2436
m1847	i0073	1847mm	72.73in	1833mm	72.18in	N/A	N/A	29.33	2552
m1931	i0076	1931mm	76.01in	1917mm	75.46in	N/A	N/A	30.67	2668
m2014	i0079	2014mm	79.29in	2000mm	78.74in	N/A	N/A	32.00	2784


<sup>1</sup> Actual total overall length of light fixture (LED strip + end caps + void/wire hole)

<sup>2</sup> Actual length of PCB strip

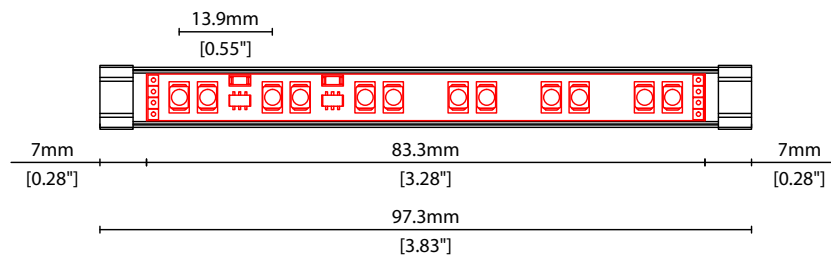


### COVER/LENS OPTIONS


\* Options are an integral part of the fixture ordering codes. Please refer to **Code Table** pages.




**X** No cover  
W9.5/H7.7mm (W0.37"/H0.30")



**D** Semi-diffused cover  
Polycarbonate finish  
W9.5/H8.4mm (W0.37"/H0.33")




**Y** Black semi-diffused cover  
Black translucent PMMA  
25% light output  
W9.5/H8.4mm (W0.37"/H0.33")




**S** 14° lens (KKLN-01D)  
14° beam linear lens,  
co-extruded PMMA  
W12.8/H20mm (W0.50"/H0.79")

### POWER FEED OPTIONS


0050 S20X 50mm (1.97") Single no sheath IP20 connector




0050 D20X 50mm (1.97") Double no sheath IP20 connector




0300 S00X 300mm (11.81") Single no sheath tail




0300 D00X 300mm (11.81") Double no sheath tail




0300 S20X 300mm (11.81") Single no sheath IP20 connector





0300 D20X 300mm (11.81") Double no sheath IP20 connector



#### 4 Pin LEDmix Female Connector

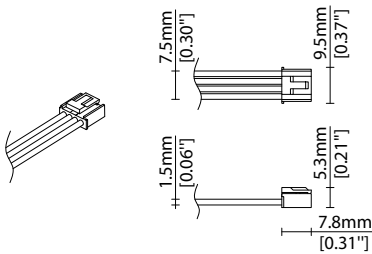

#### 4 Pin LEDmix Male Connector

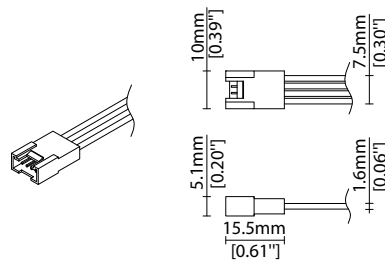

#### Key


Control Gear Power supply, sub-controllers & control systems

JB Junction box / cable connection



### MOUNTING ACCESSORIES

Note: Accessories are to be ordered separately with corresponding code shown below.




#### KKBK-20


Steel plate (allow 4 per metre/40")  
Steel finish

L40/W10/H9.4mm  
(L1.58/W0.39/H0.37")

### POWER FEED



**KKCN-18** 50mm (1.97in) pair  
**KKCN-19** 300mm (11.81in) pair  
4 PIN LEDmix male + female  
connector set



**KKCN-24**  
4 PIN LEDmix 300mm (11.81in)  
extension lead

### KKDC CONTROL



IP20  
Plastic housing  
L170/W59/H29mm  
(L6.69/W2.32/H1.14in)

**KKDM-06** 1-10V  
visDIM dimmable sub-controller  
(4 x 8A max @ 12-36V)



IP20  
Plastic housing  
L170/W53.4/H28mm  
(L6.69/W2.10/H1.10in)

**KKSC-05** DMX  
visDIM dimmable sub-controller  
(4 x 5A max @ 12-36V)

Linear

# TIMI-M R207

## Accessories

# KKDC

### KKDC CONTROL (CONTINUED)

---



IP20  
Plastic housing  
L170/W59/H29mm  
(L6.69/W2.32/H1.14in)

**KKDL-02** DALI

visDIM dimmable sub-controller  
(4 x 8A max @ 12-36V)



IP20  
Plastic housing  
L166/W53.4/H23mm  
(L6.54/W2.10/H0.91in)

**KKDL-03** DALI

visDIM dimmable sub-controller  
(4 x 5A max @ 12-36V)

### AVAILABLE PSU OPTIONS

Control Mode	PSU (Order Code)	Input Voltage AC	Output Voltage DC	Rated Output Current	Rated Power	Dim %	IP Rating
Switched	CEN-60-24	90-295V	24V	2.5A	60W	-	IP67
	HLG-60H-24	90-305V	24V	2.5A	60W	-	IP67
	HLG-100H-24	90-305V	24V	4.0A	100W	-	IP67
	HLG-150H-24	90-305V	24V	6.3A	150W	-	IP67
	HLG-240H-24	90-305V	24V	10A	240W	-	IP67
0-10V (1-10V)	PWM-40-24	90-305V	24V	1.67A	40W	100-0.15 (100-10)	IP67
	PWM-60-24	90-305V	24V	2.5A	60W	100-0.15 (100-10)	IP67
	PWM-90-24	90-305V	24V	3.67A	90W	100-0.15 (100-10)	IP67
	PWM-120-24	90-305V	24V	5.0A	120W	100-0.15 (100-10)	IP67
DALI	LIN100A1	120-277V	24V	1A per channel	100W	100-0.1	IP66/IP40
DMX RGB	LIN100A1	120-277V	24V	1.33A per channel	100W	100-0.1	IP66/IP40
DMX RGBW	LIN100A1	120-277A	24V	1A per channel	100W	100-0.1	IP66/IP40

### Flicker Free Options - Combination of PSU+ sub-controller

Control Mode	PSU (Order Code)	Sub-controller (Order Code)	Input Voltage AC	Output Voltage DC	Rated Output Current	Rated Power	Dim %	IP Rating PSU/ Sub-controller
0-10V or 1-10V	CEN-60-24	KKDM-06	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-60H-24	KKDM-06	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-100H-24	KKDM-06	90-295V	24V	4.0A	100W	100-0.9	IP67/IP20
	HLG-150H-24	KKDM-06	90-295V	24V	6.3A	150W	100-0.9	IP67/IP20
	HLG-240H-24	KKDM-06	90-295V	24V	10.0A	240W	100-0.9	IP67/IP20
DALI	CEN-60-24	KKDL-02/03	90-295V	24V	2.5A	60W	100-0.1	IP67/IP20
	HLG-60H-24	KKDL-02/03	90-305V	24V	2.5A	60W	100-0.1	IP67/IP20
	HLG-100H-24	KKDL-02/03	90-305V	24V	4.0A	100W	100-0.1	IP67/IP20
	HLG-150H-24	KKDL-02/03	90-305V	24V	6.3A	150W	100-0.1	IP67/IP20
	HLG-240H-24	KKDL-02/03	90-305V	24V	10.0A	240W	100-0.1	IP67/IP20
DMX RGB	CEN-60-24	KKSC-05	90-295V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-60H-24	KKSC-05	90-305V	24V	2.5A	60W	100-0.9	IP67/IP20
	HLG-100H-24	KKSC-05	90-305V	24V	4A	100W	100-0.9	IP67/IP20
	HLG-150H-24	KKSC-05	90-305V	24V	6.3A	150W	100-0.9	IP67/IP20
	HLG-240H-24	KKSC-05	90-305V	24V	10.0A	240W	100-0.9	IP67/IP20

<sup>1</sup> The items shown above cover the most frequently used specification but does not exhaust the possible options

<sup>2</sup> PSU and/or driver can be chosen from the table, or KKDC may recommend the best option upon receipt of the controls requirement and installation environment

<sup>3</sup> Electrical shop drawing will include detailed information of PSU and relevant control drivers

<sup>4</sup> Cut sheets are available on the controls section of [www.kkdc.lighting](http://www.kkdc.lighting) or upon request